





50

**BANK STREET**


**THIRDWAY**

# BUILDING ANALYSIS

It is important to study the building and understand the sun path, where views are and look at circulation as this forms the basis of a successful spaceplan. The process should always be analyse - formulate - find solutions - make it better.

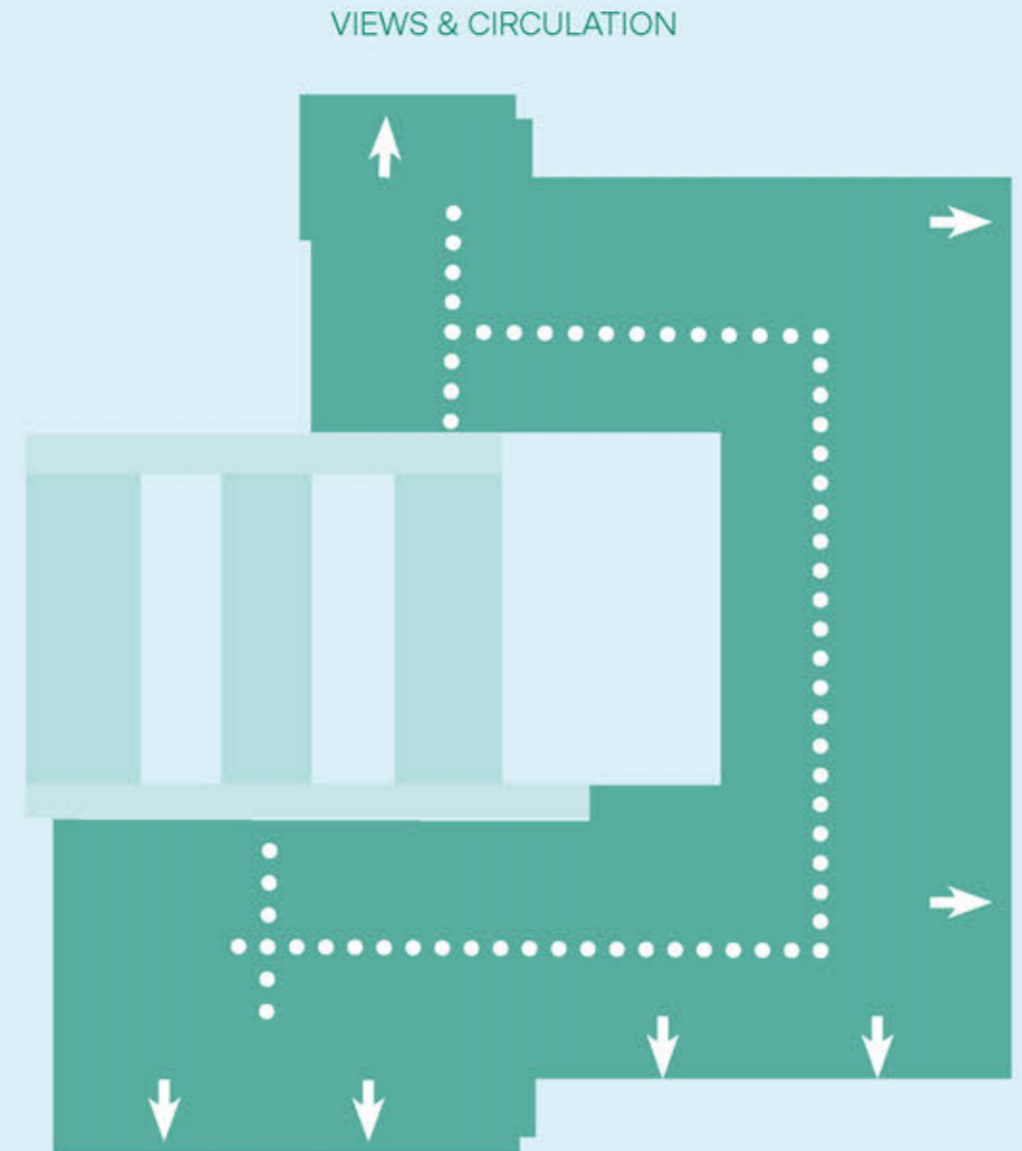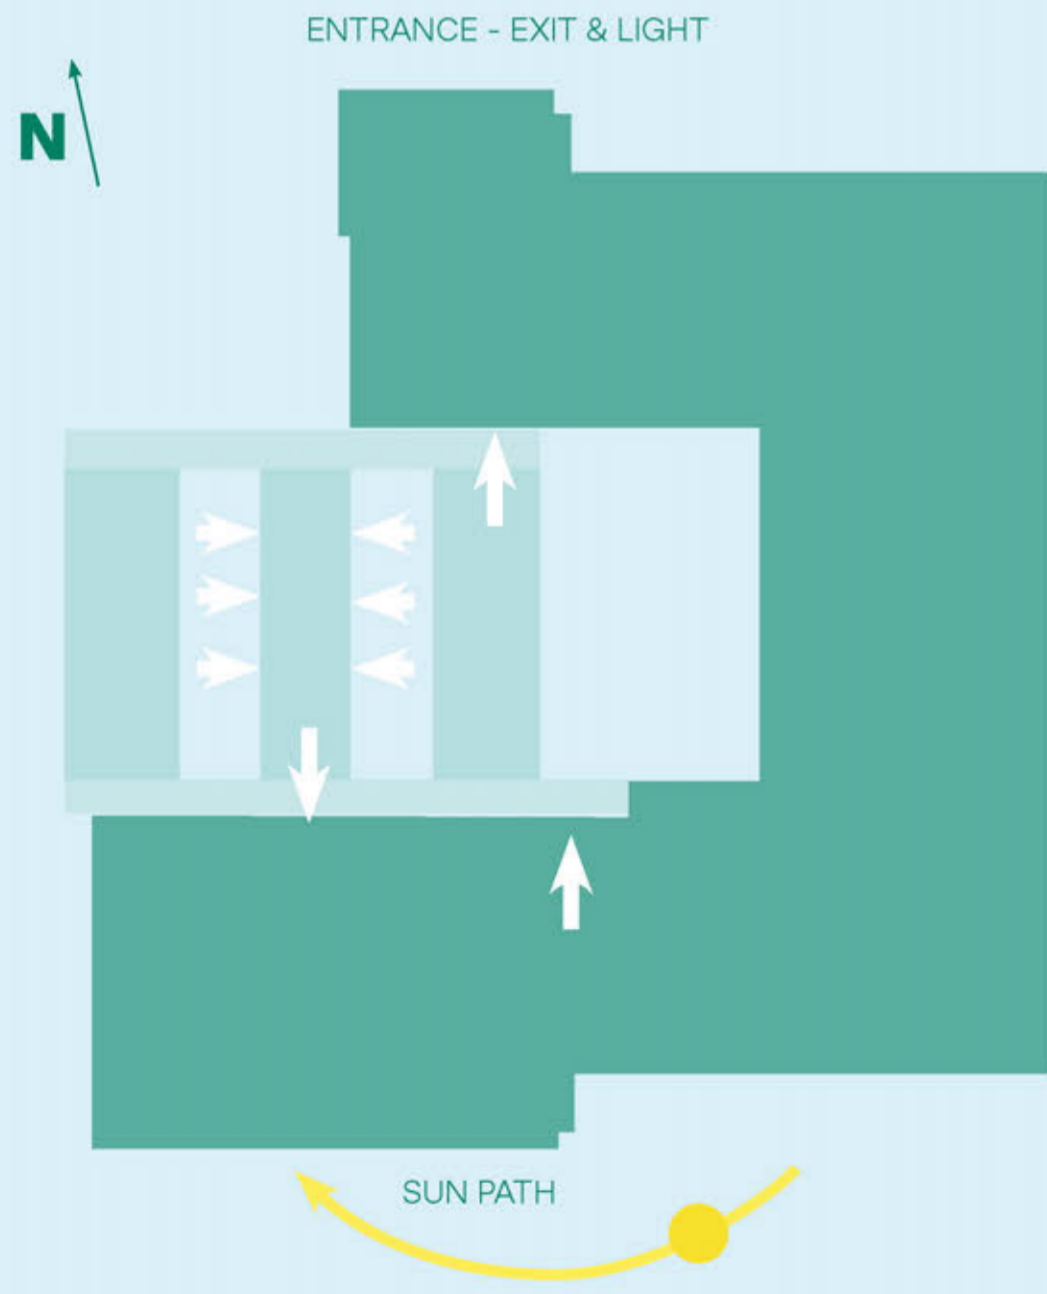

# BUBBLE DIAGRAM

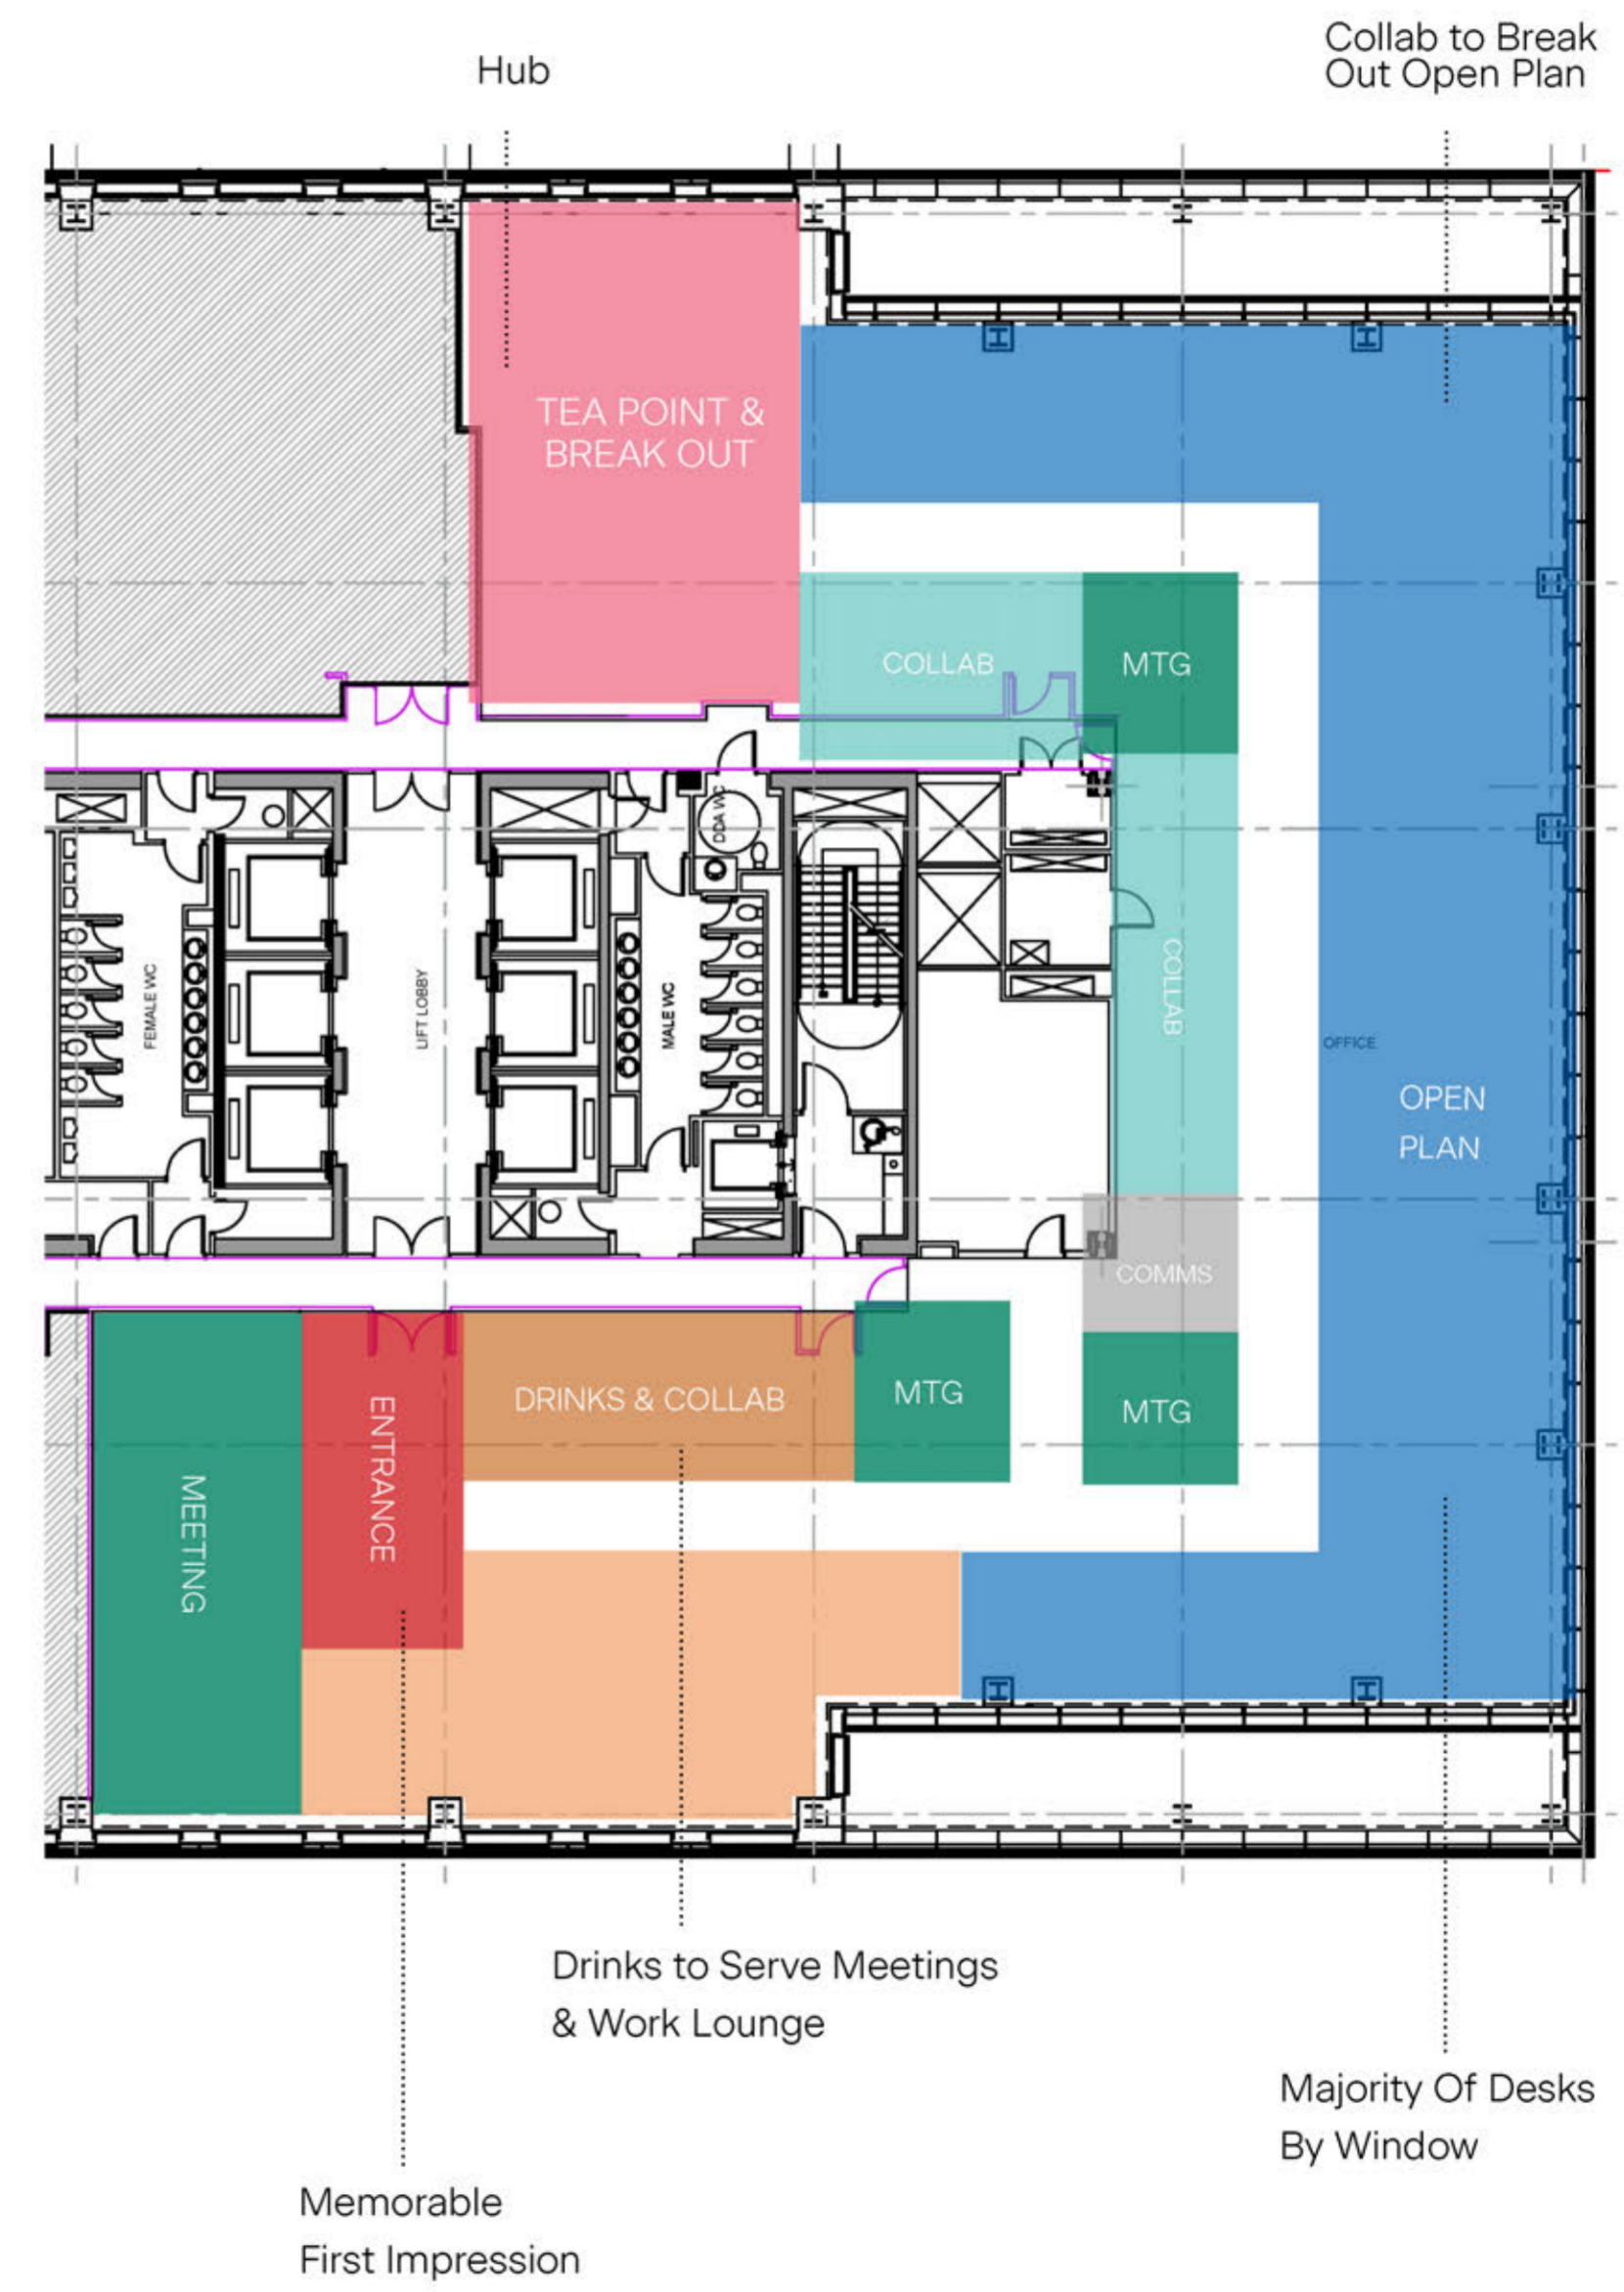

# GENERAL ARRANGEMENT PLAN

## DAY 1

### ACCOMMODATION SCHEDULE

|                          |          |
|--------------------------|----------|
| 1400mm Desks             | 80       |
| Collaboration Spaces     | 07 (39p) |
| Work Lounge              | 01(29)   |
| 18p Boardroom            | 01       |
| 8p Meeting Rooms         | 02       |
| 4p Meeting Rooms         | 02       |
| Reception & Welcome Area | 01       |
| Client Tea Point         | 01       |
| Tea Point                | 01       |
| Break Out                | 01       |
| Coats/Lockers            | 3S       |
| Print/Store              | 02       |
| Comms                    | 01       |

1:10

# 80 DESKS

# 148 WORKING

# OPPORTUNITIES

Excluding Meeting Rooms



# GENERAL ARRANGEMENT PLAN

## MAX PACK

### ACCOMMODATION SCHEDULE

|                          |         |
|--------------------------|---------|
| 1400mm Desks             | 114     |
| Collaboration Spaces     | 01 (9p) |
| Work Lounge              | 01(29)  |
| 18p Boardroom            | 01      |
| 8p Meeting Rooms         | 02      |
| 4p Meeting Rooms         | 02      |
| Offices                  | 01      |
| Reception & Welcome Area | 01      |
| Client Tea Point         | 01      |
| Tea Point                | 01      |
| Break Out                | 01      |
| Store Room               | 01      |
| Coats/Lockers            | 3S      |
| Print/Store              | 01      |
| Comms                    | 01      |

1:7

# 114 DESKS

# 152 WORKING OPPORTUNITIES

Excluding Meeting Rooms



**LOOK AND FEEL**  
LOBBY

**IMPRESSIVE | MODERN | MINIMAL**




LOBBY VISUAL



3


3

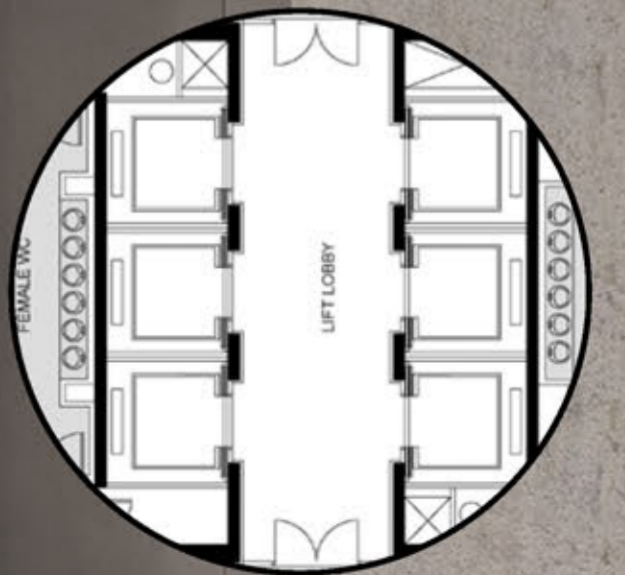


**LOOK AND FEEL**  
WC

**IMPRESSIVE | MODERN | MINIMAL**




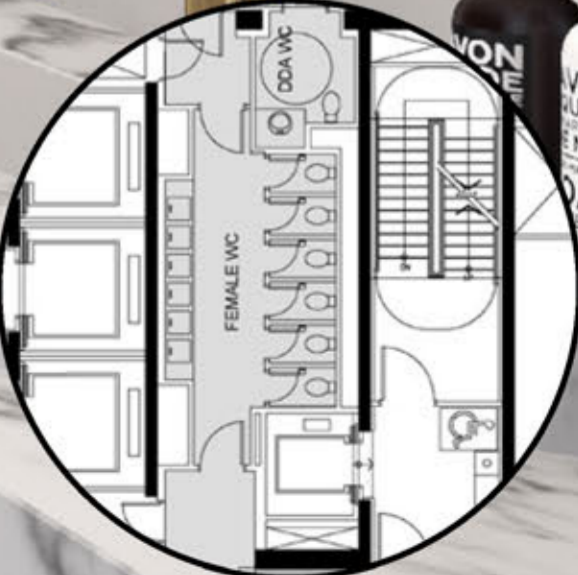


# WC VISUAL

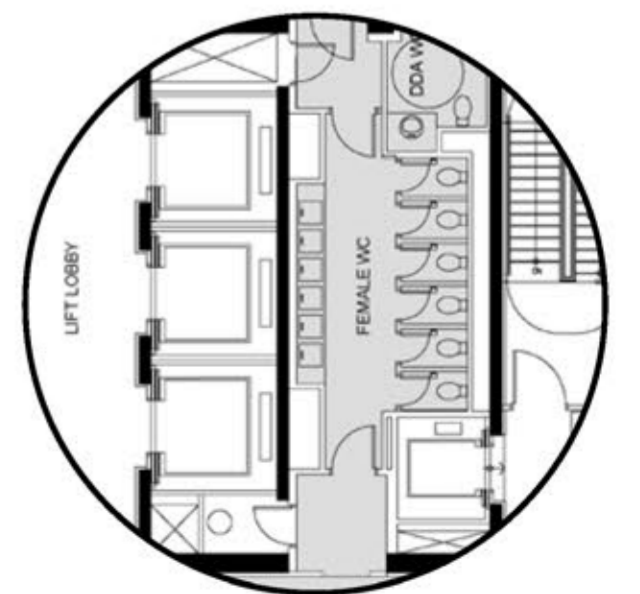


**LOOK AND FEEL**  
CAT A+


**BOLD | MEMORABLE | COLOURFUL**

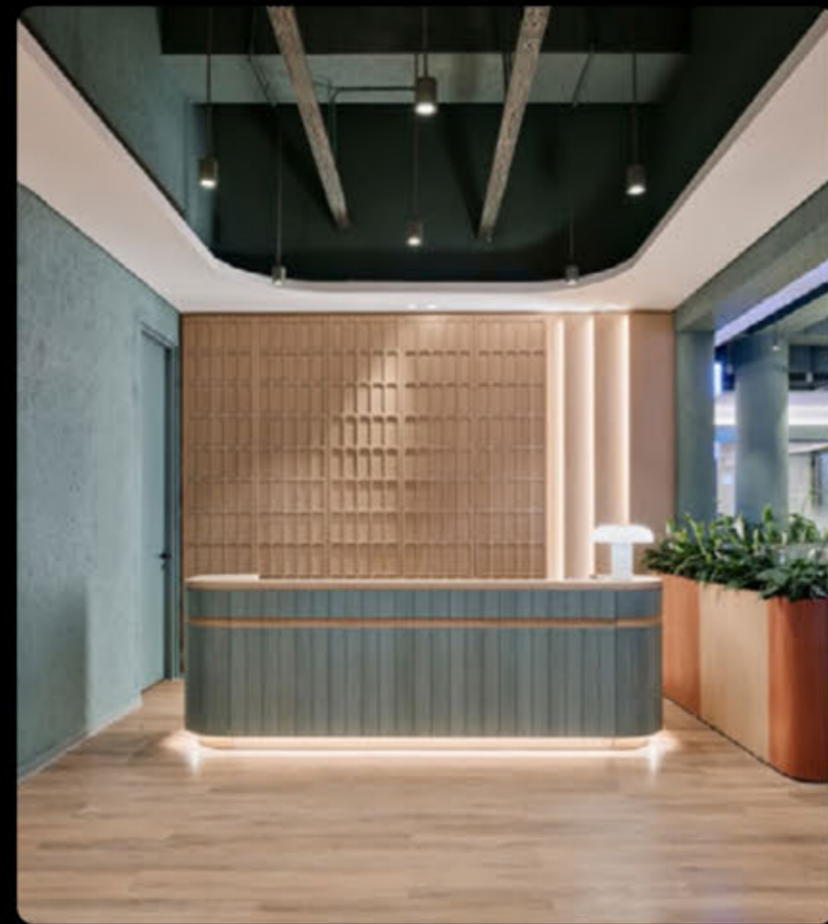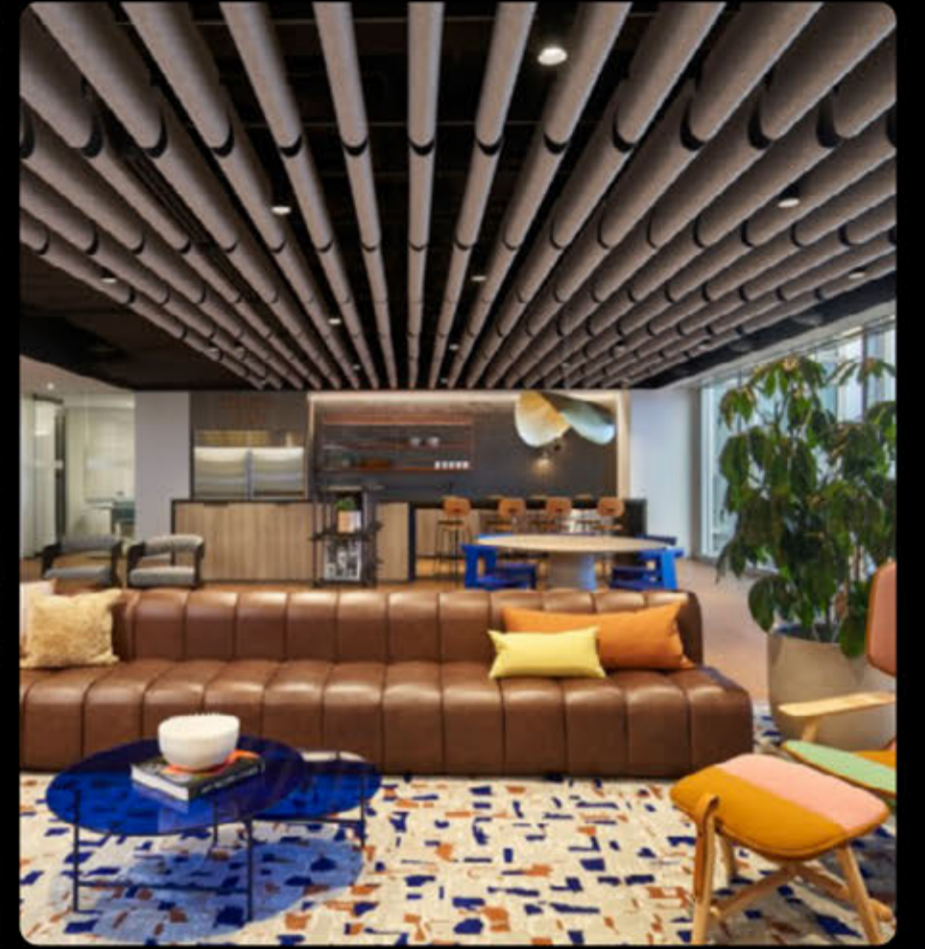


ENTRANCE VISUAL

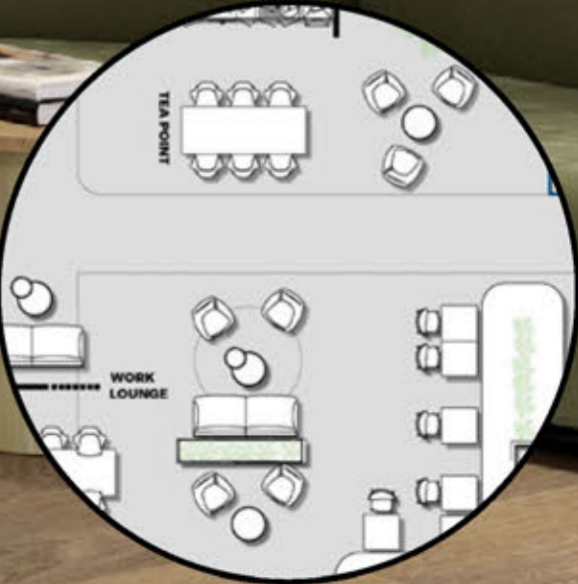


# BOARDROOM VISUAL

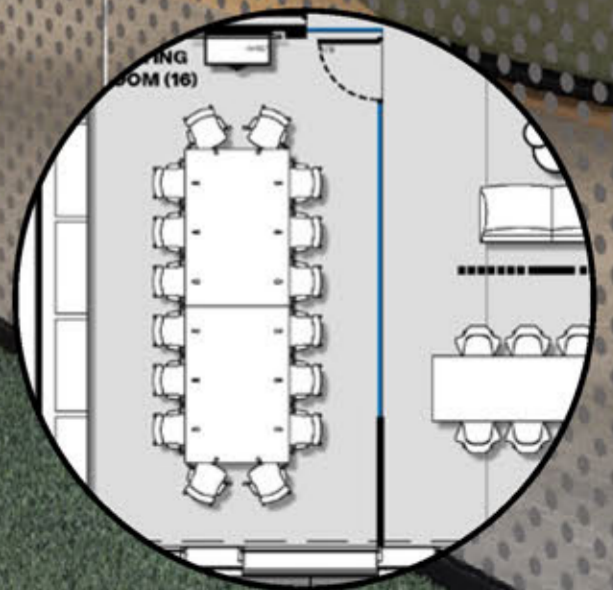

# TEAPOINT VISUAL

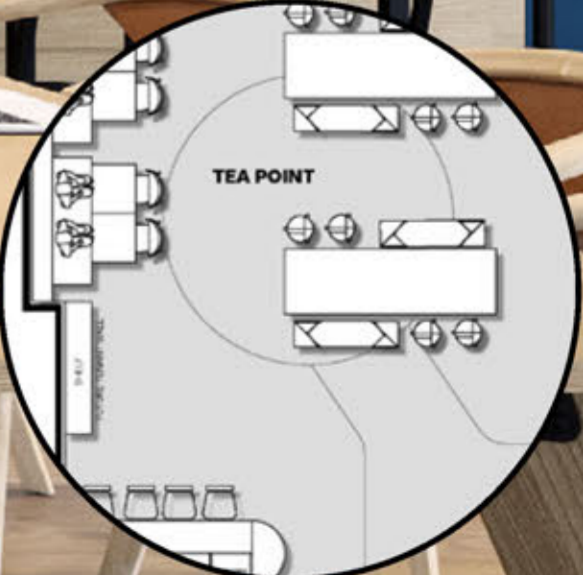

# OPEN VISUAL PLAN

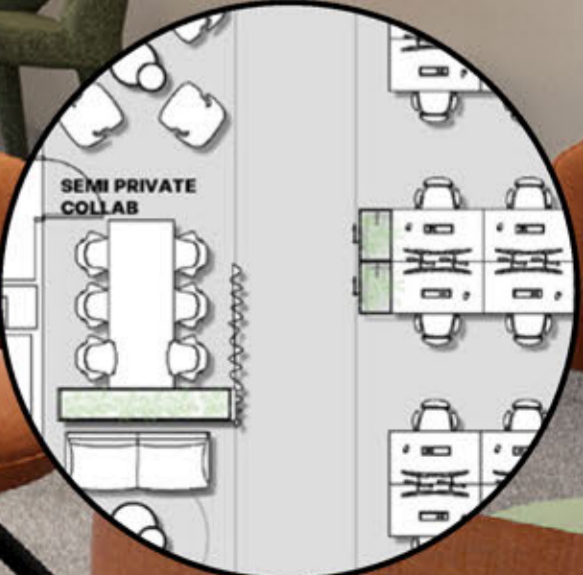

# MATERIAL PALETTE

A Bold Palette with warm undertones and rich material textures with ESG Principles in mind and timeless approach.

## KEY

- 1. Vinyl Flooring
- 2. Acoustic Carpet
- 3. Sink Unit
- 4. Vinyl Flooring
- 5. Joinery Finish
- 6. Table Top and Legs, Chair Details, Partition Frames, Black Panels
- 7. Accent Paint Colours
- 8. Plush Rug
- 9. White Panels
- 10. Ironmongery
- 11. Tea Point Finish
- 12. Fabric Upholstery Finishes
- 13. Vinyl Flooring
- 14. Vinyl Flooring
- 15. Biophilia



# FLOOR FINISHES


## KEY



1. Vinyl Flooring



2. Vinyl Flooring



3. Rug



4. Carpet



5. Carpet



6. Vinyl Flooring



7. Vinyl Flooring



# GENERAL ARRANGEMENT PLAN

## MAX PACK

### ACCOMMODATION SCHEDULE

|                          |         |
|--------------------------|---------|
| 1400mm Desks             | 114     |
| Collaboration Spaces     | 01 (9p) |
| Work Lounge              | 01(29)  |
| 18p Boardroom            | 01      |
| 8p Meeting Rooms         | 02      |
| 4p Meeting Rooms         | 02      |
| Offices                  | 01      |
| Reception & Welcome Area | 01      |
| Client Tea Point         | 01      |
| Tea Point                | 01      |
| Break Out                | 01      |
| Store Room               | 01      |
| Coats/Lockers            | 3S      |
| Print/Store              | 01      |
| Comms                    | 01      |

1:7

# 114 DESKS

# 152 WORKING OPPORTUNITIES

Excluding Meeting Rooms



# GENERAL ARRANGEMENT PLAN

## DAY 2 - CORPORATE

THE PROPOSED FIT-OUT CAN EASILY BE MODIFIED TO FIT POSSIBLE CORPORATE TENANTS.


- BUILT DAY ONE
- DAY 2 EASY CHANGES

### ACCOMMODATION SCHEDULE

|                          |          |
|--------------------------|----------|
| 1400mm Desks             | 92       |
| Collaboration Spaces     | 03 (24p) |
| Work Lounge              | 01       |
| 18p Boardroom            | 01       |
| 8p Meeting Rooms         | 02       |
| 6p Meeting Rooms         | 02       |
| 4p Meeting Rooms         | 01       |
| Offices                  | 05       |
| Reception & Welcome Area | 01       |
| Client Tea Point         | 01       |
| Tea Point                | 01       |
| Break Out                | 01       |
| Store Room               | 01       |
| Coats/Lockers            | 3S       |
| Print/Store              | 02       |
| Comms                    | 01       |

1:9

- NEW OFFICE
- NEW PARTITION
- MORE DESKS
- NEW OFFICE
- NEW OFFICE
- NEW OFFICE
- NEW MEETING ROOM
- NEW RECEPTION
- NEW OFFICE

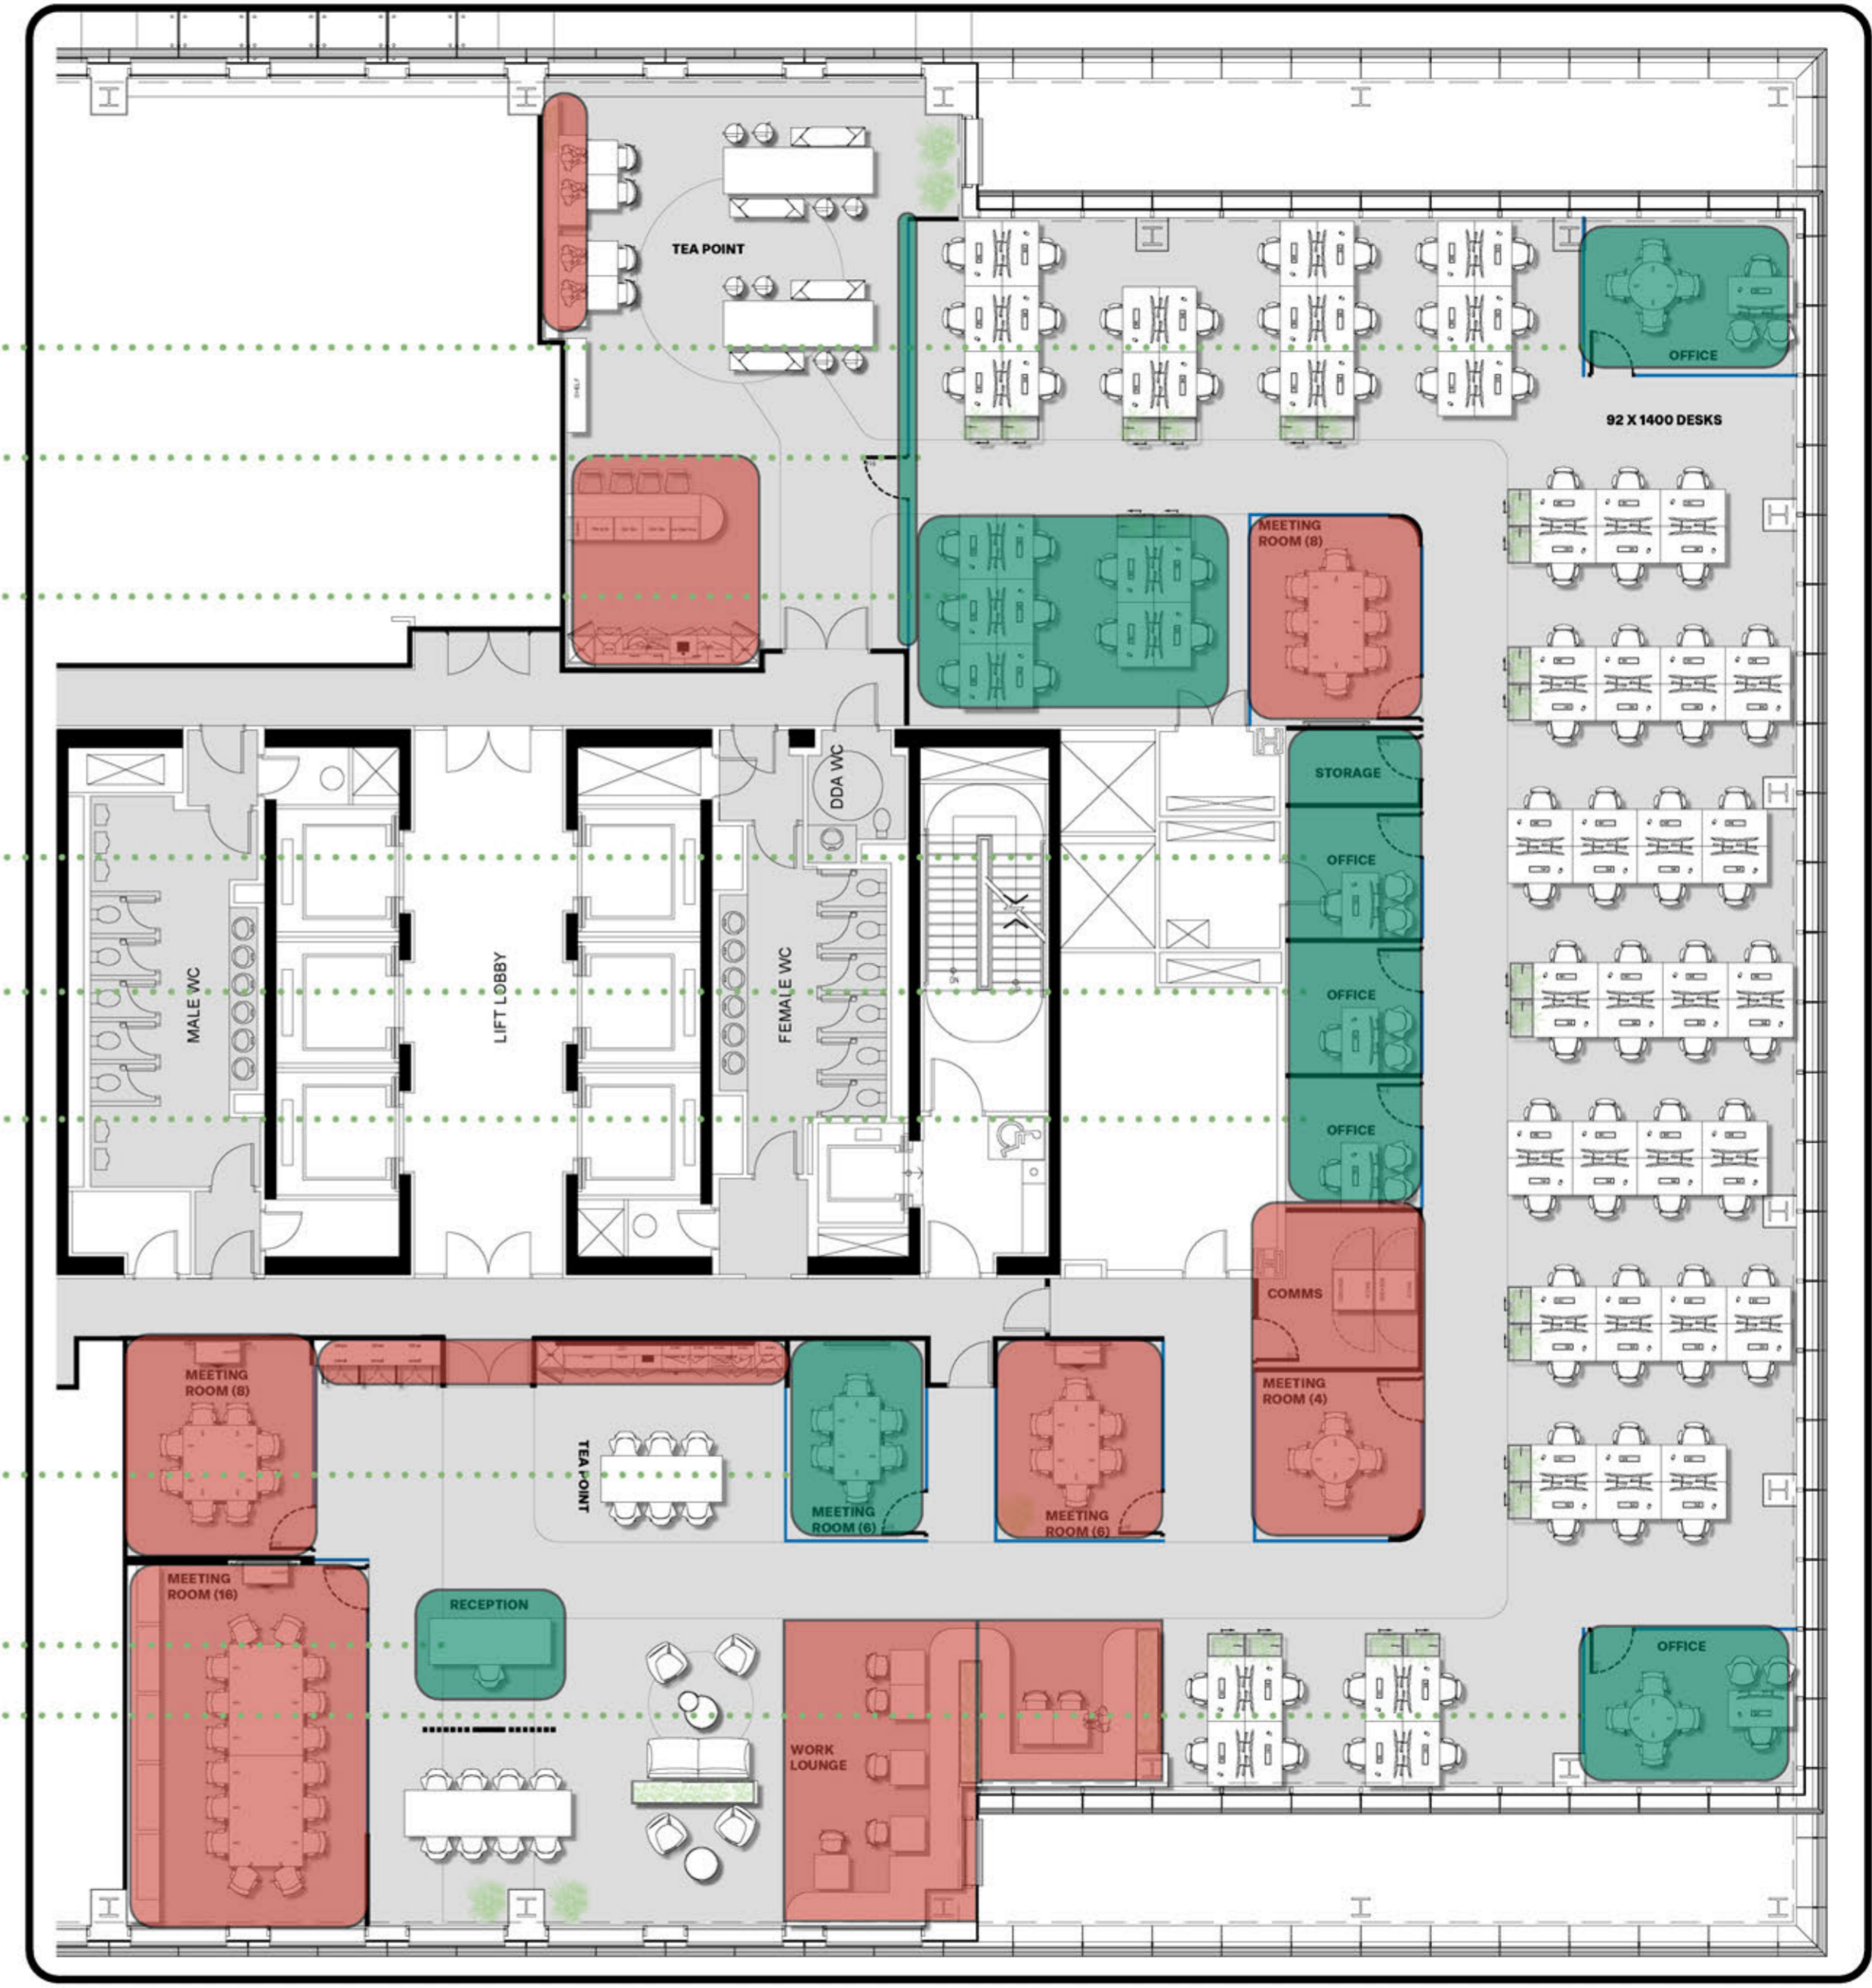

# GENERAL ARRANGEMENT PLAN

## DAY 2 - TECH/FINTECH

THE PROPOSED FIT-OUT CAN EASILY BE MODIFIED TO FIT POSSIBLE TECH/FINTECH TENANTS.

BUILT DAY ONE

DAY 2 EASY CHANGES

### ACCOMMODATION SCHEDULE

|                          |          |
|--------------------------|----------|
| 1400mm Desks             | 86       |
| Collaboration Spaces     | 03 (24p) |
| Work Lounge              | 01(34p)  |
| 18p Boardroom            | 01       |
| 8p Meeting Rooms         | 02       |
| 4p Meeting Rooms         | 02       |
| Single Pods              | 02       |
| Soft Meeting             | 01       |
| Reception & Welcome Area | 01       |
| Client Tea Point         | 01       |
| Tea Point                | 01       |
| Break Out                | 01       |
| Coats/Lockers            | 3S       |
| Print/Store              | 02       |
| Comms                    | 01       |

1:10

MORE DESKS  
 MORE COLLAB  
 NEW PODS

CHANGE FURNITURE TO SOFT MEETING  
 NEW RECEPTION/BAR  
 NEW POOL TABLE



# BRANDING OPPORTUNITIES

DAY 2

 BRANDING OPPORTUNITIES



**1. RECEPTION FEATURE WALL BRANDING**



**2. MANIFESTATION**



**3. MEETING FEATURE WALLS**




**4. FEATURE PAINT WALLS**



**5. SUPERGRAPHICS**



**6. 3D INSTALLATIONS**

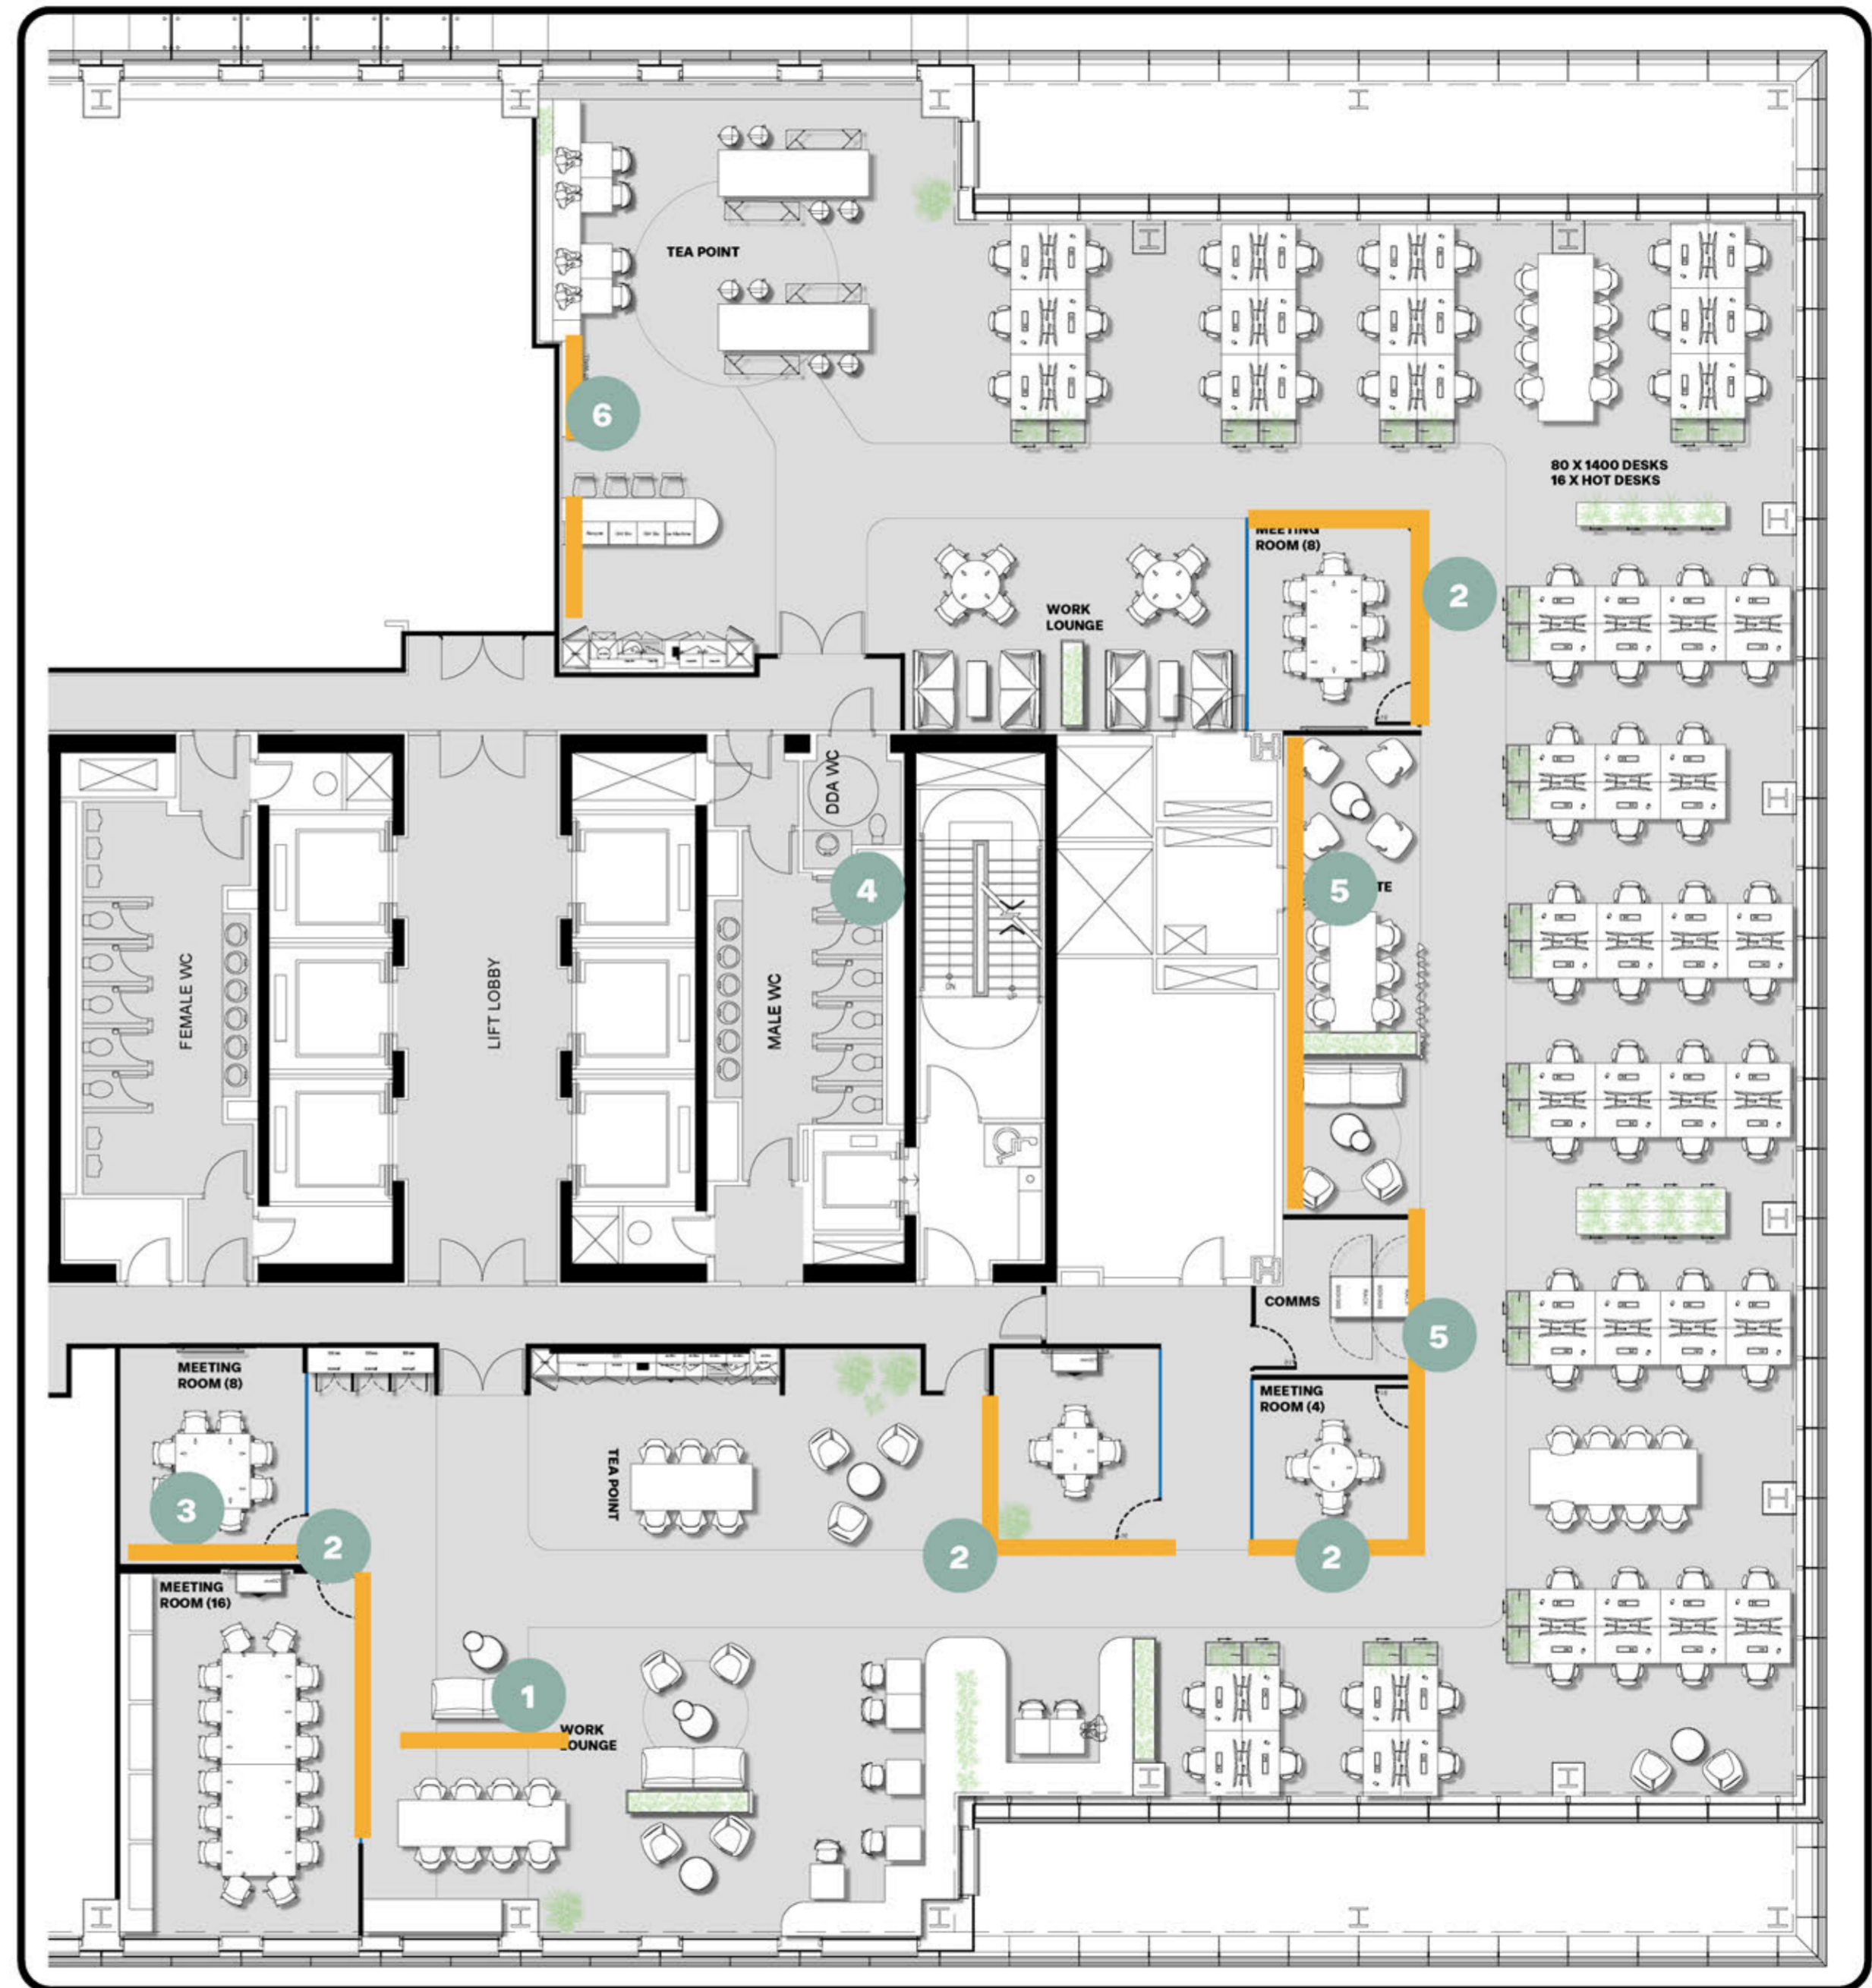



**SERVICES DESIGN**

# SERVICES DESIGN STATEMENT

As Technical Services Manager at Thirdway, I work with both the designer & commercial manager to ensure the office design integrates seamlessly with the building's service infrastructure.

Working with our key sub-contractors we will design in full the mechanical, electrical & plumbing services to suit the layout and maintain full operational quality whilst remaining cost effective.

We have available at request, full method statements from both mechanical & electrical contractors along with an overview of the testing & commissioning process, and I have ensured that sustainability & air quality have remained at the forefront of the service design.

---

## MILAN MURPHY

Technical Services Engineer

### Mechanical

The existing mechanical system on the 3rd floor is a Variable Air Volume (VAV) system. Essentially, these boxes are able to independently ramp their fan speed up and down in order to suit the heating/cooling needs of the space. We have these VAV boxes strategically positioned around the perimeter of the building and in key internal areas to disperse fresh air across the floor plate. These boxes have internal chilled water coils to provide cooling, and electric heater batteries to provide heating. The scope of works for this project is as follows.

- We propose to relocate 6 of the VAV boxes suit the new layout and cellular spaces. In the large meeting room, we will install a CO2 monitor that will link back to the room's VAV box. Should the CO2 level surpass a set level (typically 700-900ppm), the VAV box will ramp up to deliver more fresh air to the space.
- We have return air grilles throughout the space to allow for extract air, and cross talk attenuators will provide a return air path from offices/meeting room while maintaining acoustic integrity.
- The relocations involve freezing the pipework, cutting, and reintegrating into the system. We have allowed for all water sampling, flushing, and commissioning (with controls) as dictated by Building Regulations and Landlord directives.
- We have allowed for all tea point plumbing, including leak detection, hot water boilers, and drainage pumps.


### Electrical

For the electrical scope, we have aimed to use as much of the existing systems as possible, where it still meets the latest wiring regulations. For this project, we will retain the existing distribution board and LED panel lighting, while adapting the lighting control system to suit the layout. Both electrical and mechanical metering has been added to meet the specific building requirements.


- We have allowed for new underfloor Electrak which will distribute all the small power to new 3 compartment floor boxes at the desking positions. Desk power will be protected by local RCD sockets to minimise disruption should a single desk component fail. New AV power is included for meeting room and all utilities.
- We will modify the existing intelligent lighting system to suit the new layouts, including for scene setting plates to all meeting room and individual offices. Feature lighting will be added to the layout as per design intent and visuals.
- The emergency lighting and fire alarm systems will be adapted to ensure compliant exit lighting levels and that building control regulations are met.




# LIGHTING LAYOUT

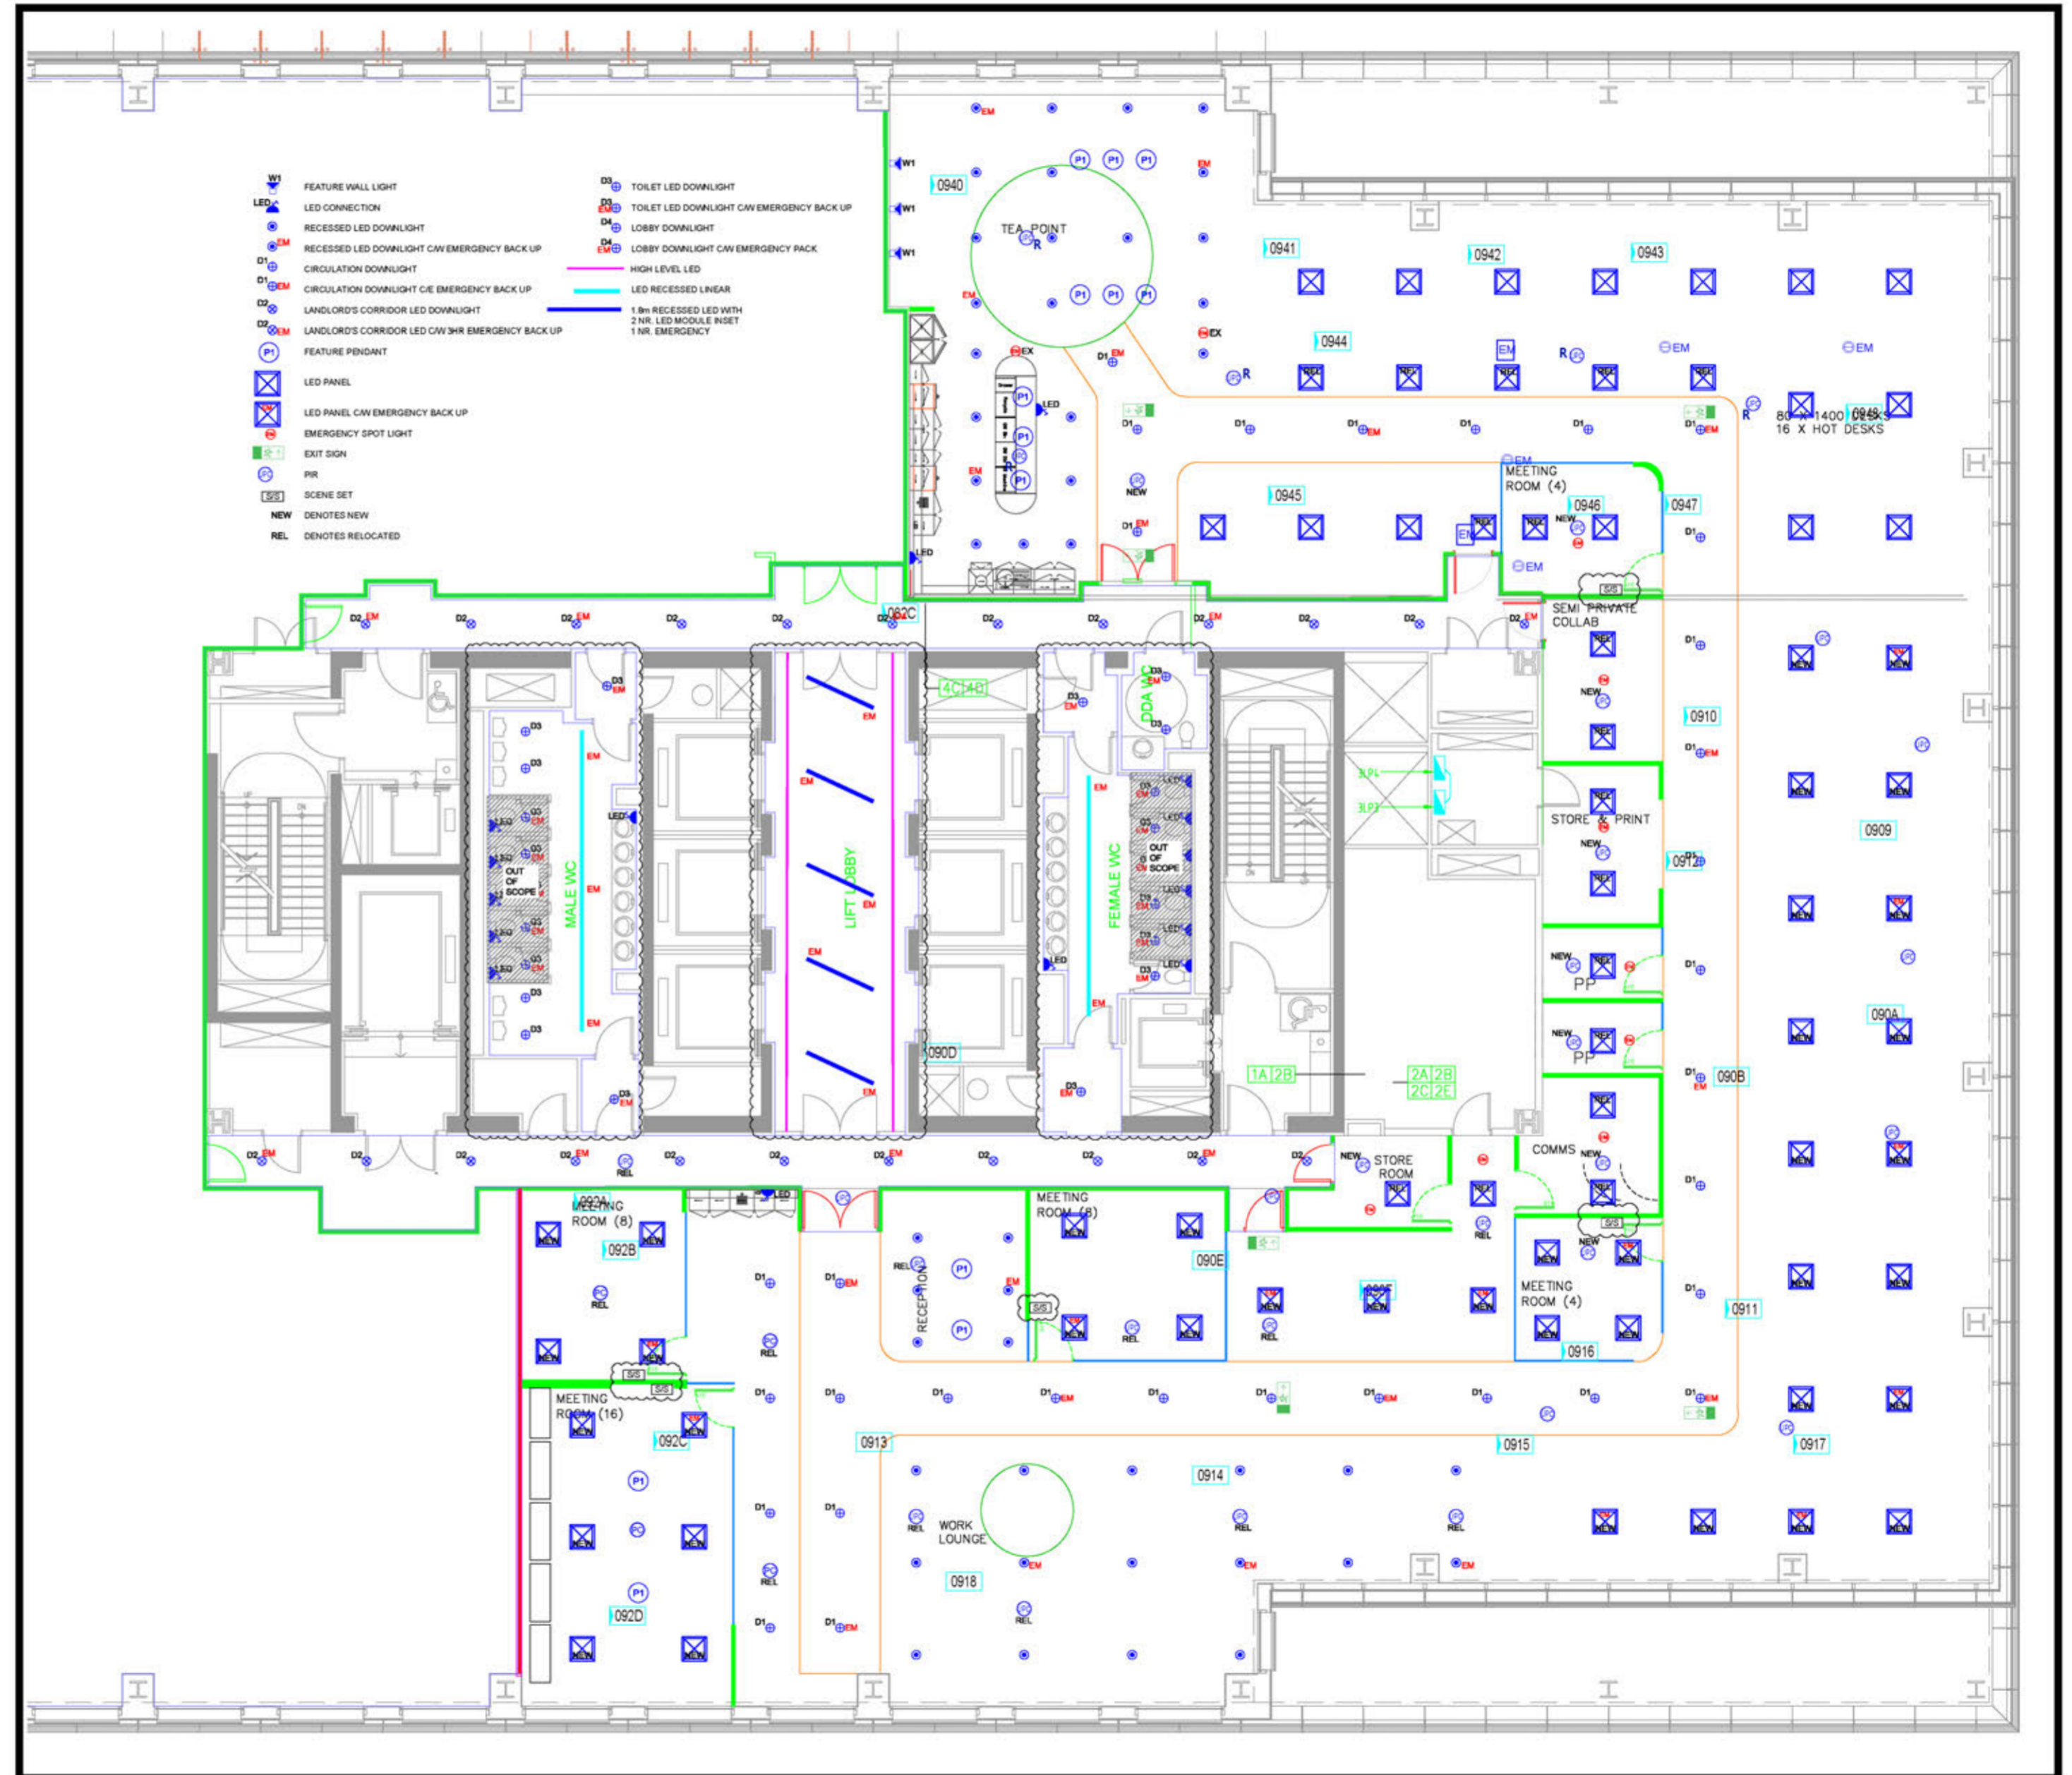

# MECHANICAL PLAN

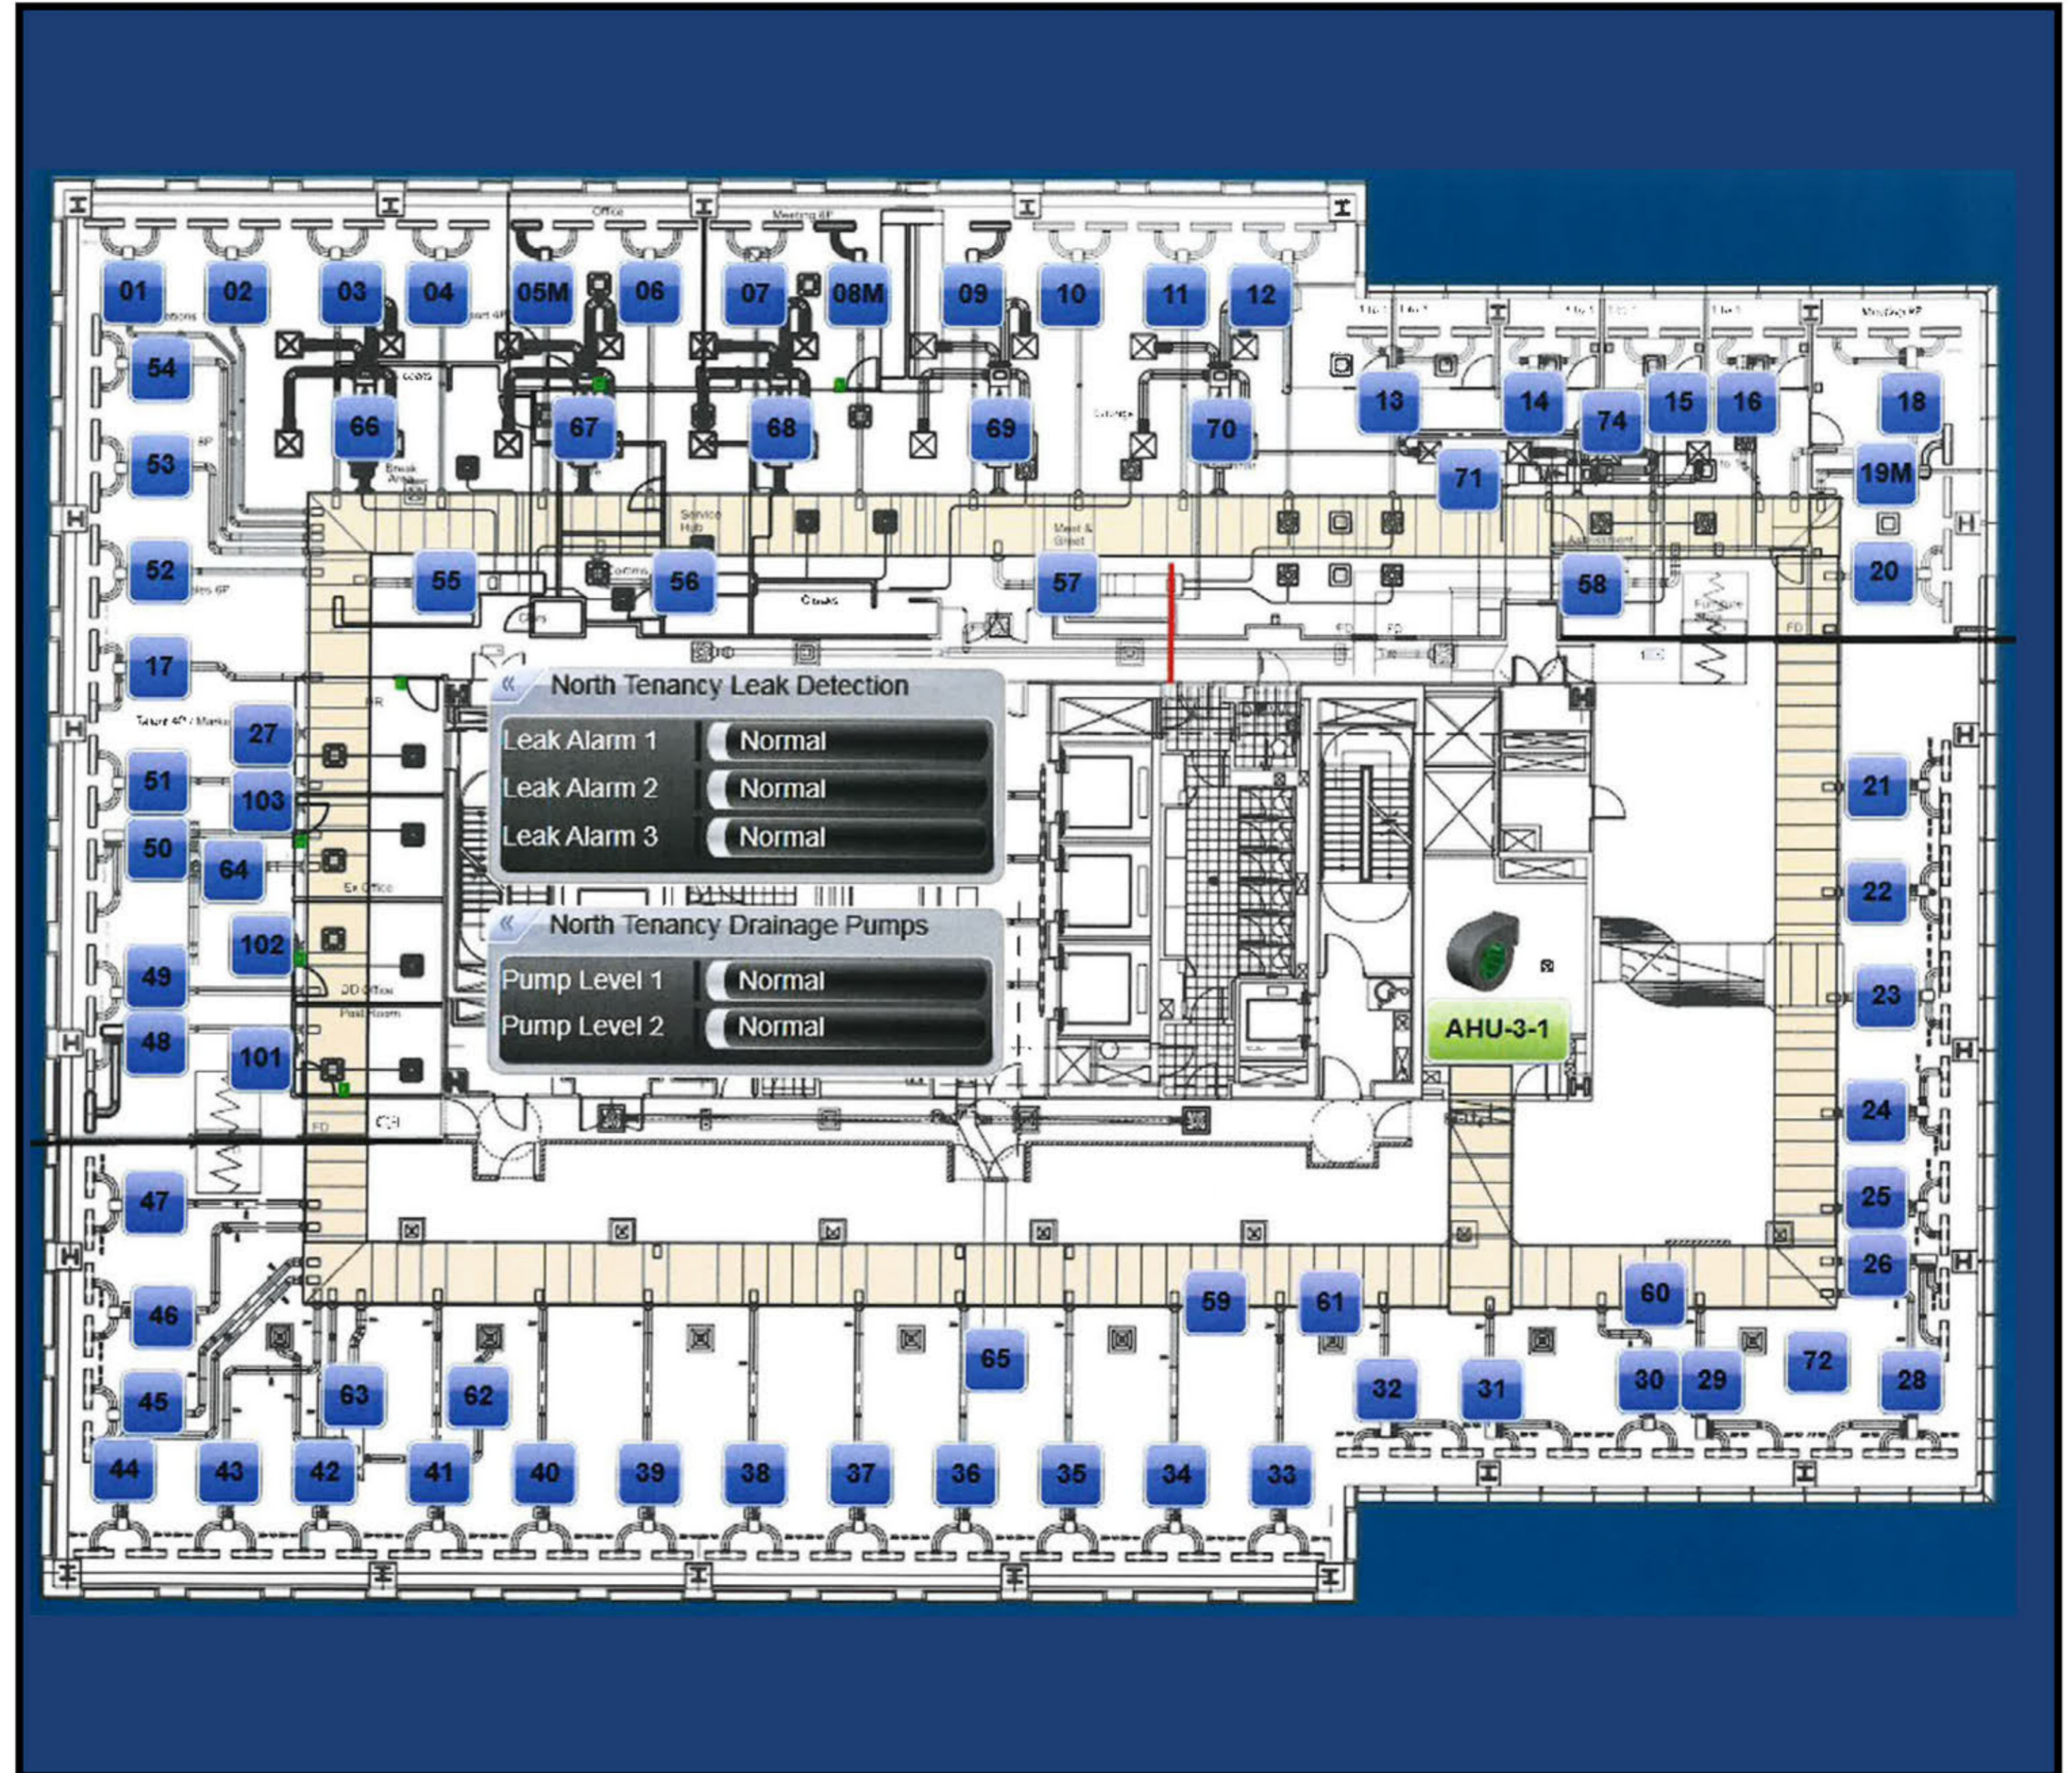

# ELECTRICAL PLAN

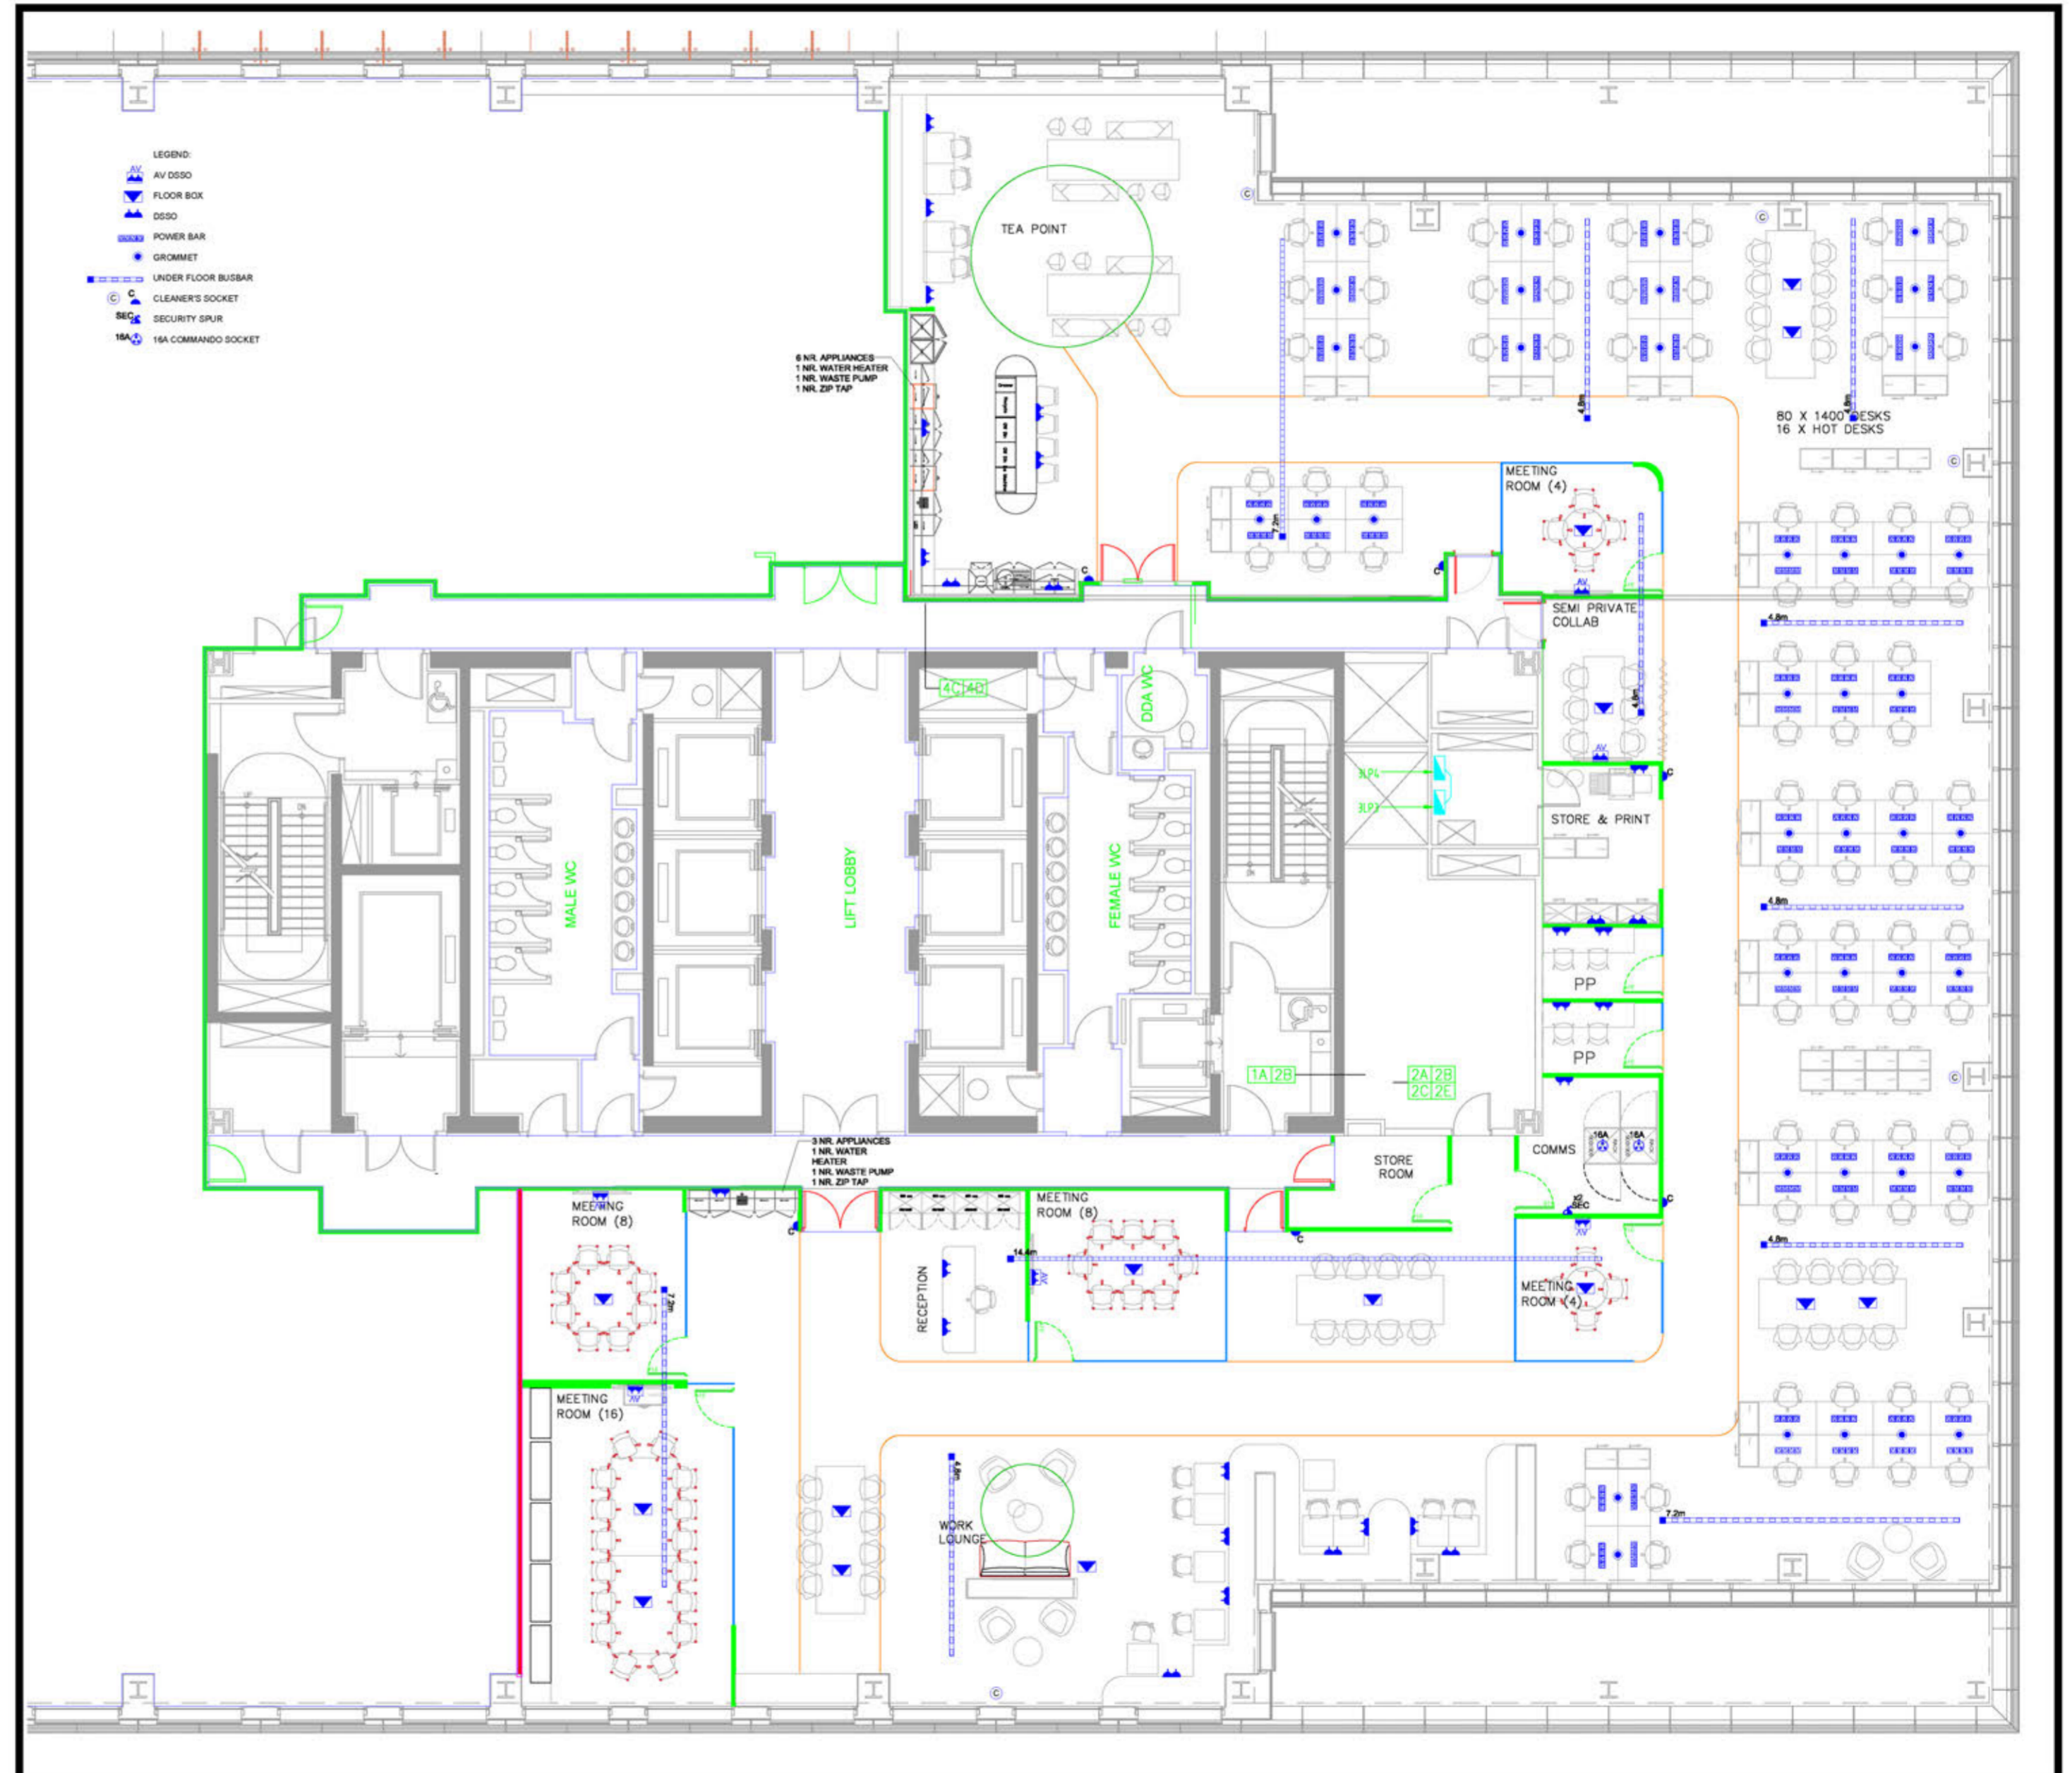




**FURNITURE**


**FURNITURE PROPOSAL**



# PRE-CONTRACT PROGRAMME

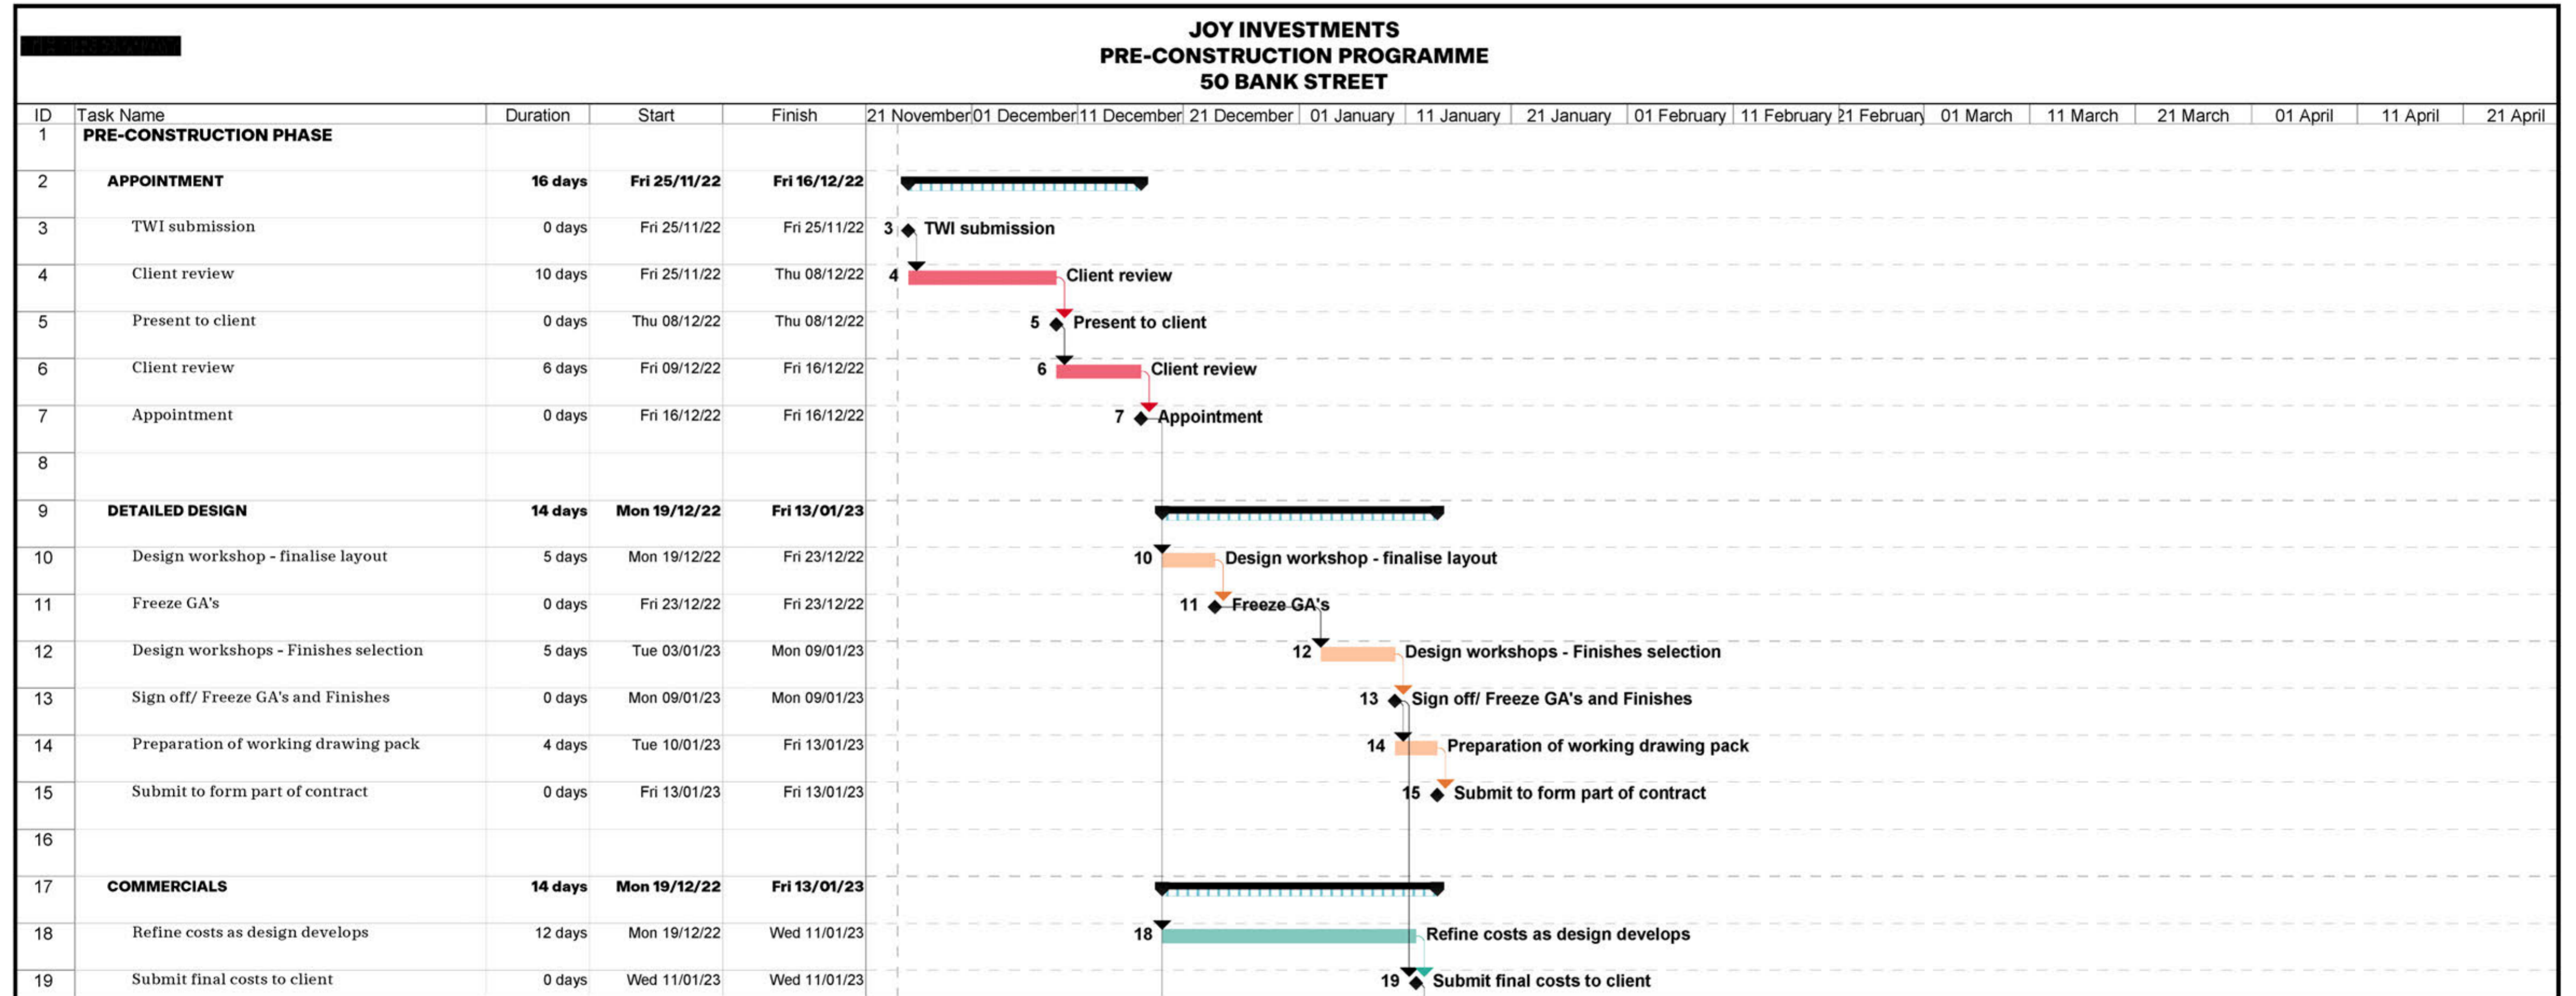

# PRE-CONTRACT PROGRAMME

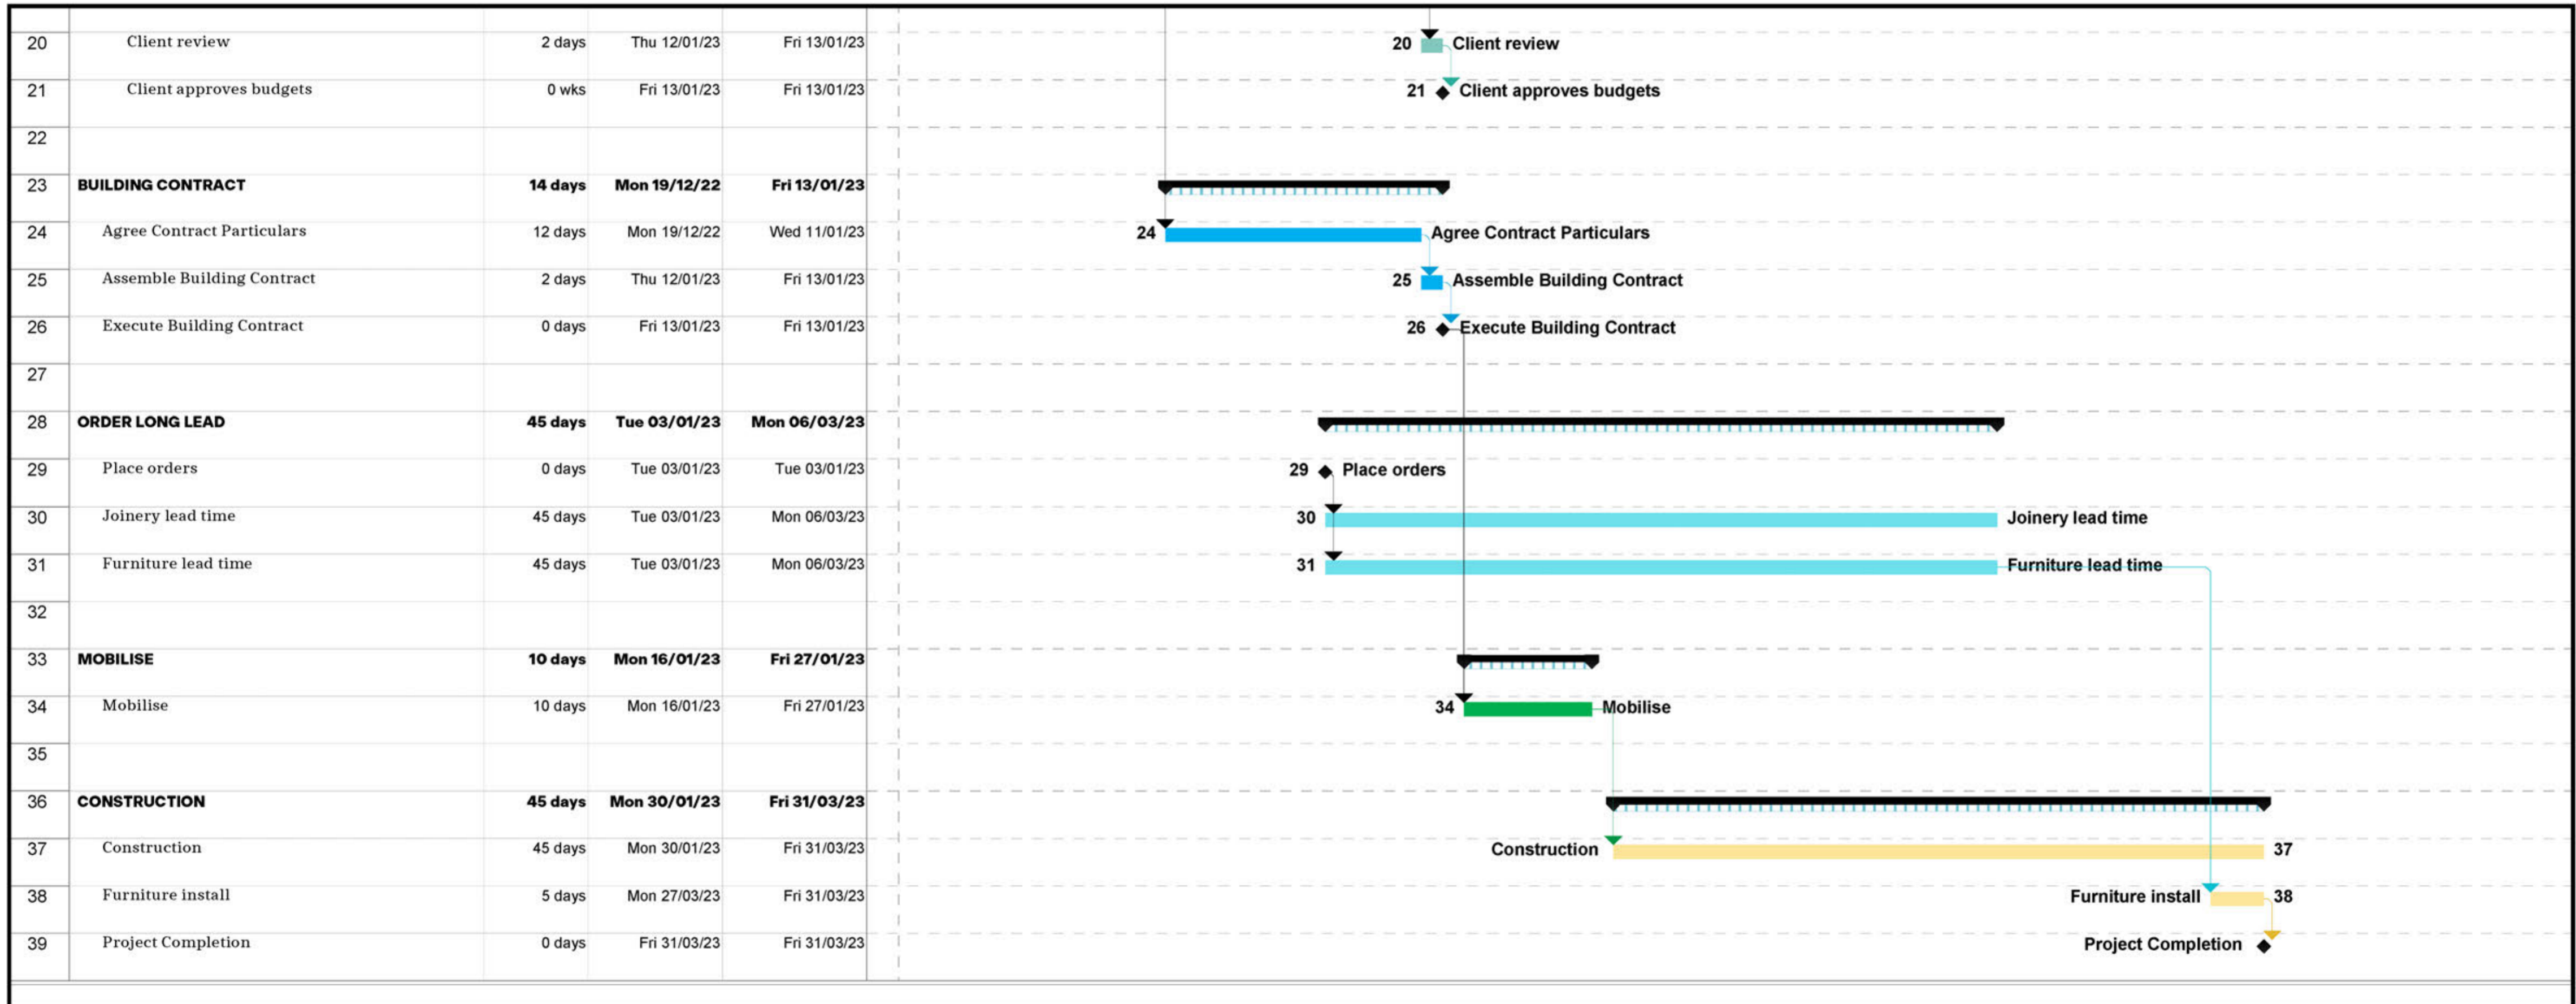

# LOOK AHEAD

## KEY ACTIVITIES

### WEEK ONE

Kick off meeting:  
1 hours

Activities:

- Review proposal GA for feedback
- Capture feedback on concept, visuals, brand
- Discuss furniture proposal
- Discuss commercials and value engineering Issue part i LTA

### WEEK TWO

Design Workshop:  
2 hours

Activities:

- Freeze GA, concept and visuals
- Review MEP design and services coordination
- Review IT / AV proposals
- Issue part 2 LTA Issue Contract
- Furniture Tour: 2 hours

### WEEK THREE

Commercial Review:  
1 hours

Activities:

- Review contract drawings
- LTA comments / feedback,
- Review contract

### WEEK FOUR

Final Design Workshop:  
2 hours

Activities:

- Sign off finishes / samples
- Review & sign off MEP design
- Finalise IT / AV proposals
- Order Furniture Sign contract
- Review & sign off construction drawings
- Review commercials: 1 hour

## KEY RISKS

### STAKEHOLDER AVAILABILITY

Prior planning to identify the core availability times for the 50 Bank Street stakeholder team to ensure that you are in the driving seat and fully informed during the detailed design phase and that all input is captured.

### AVAILABILITY OF INFORMATION

Ensuring we have full as-built mechanical & electrical information for the 3rd floor is a key step in finalising our design and costs.

We will work in conjunction with yourselves to obtain this information.

### LONG LEAD ITEMS

Given the length of the programme driven by the specified target completion date, long lead items should cause little risk. However, we will closely manage the following items to ensure these are placed in good time:

Furniture, Joinery, AV & IT, Mechanical (Fan coils)

### COORDINATION OF SERVICES

Combined coordination of all mechanical, electrical, data, IT and AV works to be planned from the get go.

Engagement with any incumbent contractors to flush out proposed scope, lead time, programming and design requirements

### INCREASING CONSTRUCTION COSTS

We will work closely with our supply chain to lock in favorable pricing early to avoid increasing costs.

A procurement schedule will be produced early in the programme identifying high risk items where early orders would protect 50 Bank Street against rising prices.



# PROCUREMENT SCHEDULE

| Approval Tracker: |  |        | Low Risk  | Medium Risk | Possible Delay   |
|-------------------|--|--------|-----------|-------------|--|
| Item              | Description  | Origin | Lead Time |             | Comments   |
| <b>1</b>          | <b>Ceilings</b>                                    |        |           |             |  |
| 1.01              | British Gypsum Plasterboard                        | UK     | 1 week    |             | UK Fabrication, good stock levels                                    |
| 1.02              | British Gypsum Plasterboard- Bulkheads             | UK     | 1 week    |             | UK Fabrication, good stock levels                                    |
| 1.03              | Acoustic Ceilings                                  | UK     | 6-8 weeks |             | Multiple options available   |
| <b>2</b>          | <b>Partitions and Doors</b>                        |        |           |             |  |
| 2.01              | Aluminium Stud and Plasterboard for Partitions     | UK     | 1 week    |             | UK Fabrication, good stock levels                                    |
| 2.02              | MDF Skirting Board                                 | UK     | 1 week    |             | UK Fabrication, good stock levels                                    |
| 2.03              | Glazed Doors                                       | UK     | 6-8 weeks |             | UK Fabrication, good stock levels                                    |
| 2.04              | Glazed Partitions                                  | UK     | 4-6 weeks |             | UK Fabrication, good stock levels                                    |
| 2.05              | Solid Doors  | UK     | 4 weeks   |             | UK Fabrication, good stock levels                                    |
| 2.06              | Ancillaries  | UK     | 2 weeks   |             | UK Fabrication, good stock levels                                    |
| <b>3</b>          | <b>Small Power and Lighting</b>                    |        |           |             |  |
| 3.01              | Feature Light Fittings                             | EU     | 6-8 weeks |             | Multiple options available   |
| 3.02              | Electrac and Floorboxes                            | UK     | 1 week    |             | UK Fabrication, good stock levels                                    |
| 3.03              | 2nd Fix Power (DSSO etc)                           | UK     | 1 week    |             | UK Fabrication, good stock levels                                    |
| 3.04              | Incumbent Contractors (Lighting Controls)          |        |           |             | Engage early to ensure incumbents are on contractors programme dates |
| <b>4</b>          | <b>Fire Alarms</b>                                 |        |           |             |  |
| 4.01              | Incumbent Contractors (Fire Alarms and Sprinklers) |        |           |             | Engage early to ensure incumbents are on contractors programme dates |
| <b>5</b>          | <b>Data</b>  |        |           |             |  |
| 5.01              | Data Cables- Cat 6A                                | UK     | 2 weeks   |             | By Client- early engagement  |
| <b>6</b>          | <b>HVAC &amp; Plumbing</b>                         |        |           |             |  |
| 6.01              | Incumbent Contractors ( BMS)                       |        |           |             | Engage early to ensure incumbents are on                             |
| 6.02              | Grilles and Linears                                | UK     | 1 week    |             | UK Fabrication, good stock levels                                    |
| 6.03              | Cross Talk Attenuators                             | UK     | 1 week    |             | UK Fabrication, good stock levels                                    |
| 6.04              | VAV Units  | EU     | 8 weeks   |             | European Fabrication, early order essential                          |
| 6.05              | Plumbing Equipment (Water Heater, Pumps etc)       | UK     | 2 week    |             | UK Fabrication, good stock levels                                    |
| <b>7</b>          | <b>Wall Finishes</b>                               |        |           |             |  |
| 7.01              | Feature Wall Finishes                              | UK     | 1 week    |             | UK Fabrication, good stock levels                                    |
| <b>9</b>          | <b>Floor Finishes</b>                              |        |           |             |  |



# RISK REGISTER

| Risk Nr | Risk Description  | Mitigation   | Probability | Impact | Risk Ranking      | Probability % applied | Risk Owner | Status   |
|---------|---|--|-------------|--------|-------------------|-----------------------|------------|--|
| 1       | Planning  |  |             |        |                   |                       |            |  |
| 1.01    | No Planning Risks forecasted or Considered at This stage of the process   |  |             |        |                   | 0%                    |            |  |
| 2       | Development/Project Management  |  |             |        |                   |                       |            |  |
| 2.01    | Contract Agreement  | Ensure method of agreement and required amendments are available as early as possible to ensure adequate time is allowed for review/comment and agreement                                    | L           | M      | LOW               | 50%                   | Client/TWI | Contract amendments have only got minor comments against and we have a full technical pack already. The contract should be low risk.   |
| 3       | Design  |  |             |        |                   |                       |            |  |
| 3.01    | As Built Information - We have received mechanical and electrical as built drawings but in order to finalise remaining provisional sums i.e BMS updates, we will need full O&M manuals and commissioning certificates | Full validation and Landlord engagement sessions to be made available as soon as possible to limit any future potential risks  | L           | M      | MED               | 50%                   | Client     | We have a schedule of provisional sums and will aim to close all of these out before reaching contract.  |
| 3.02    | Agreement of layouts  | Early agreement of layouts will enable all teams to ensure swift production of information required for the project to advance to next stages  | L           | M      | LOW               | 75%                   | TWI        | Cost impact dependent on agreed final layout   |
| 3.03    | Finishes agreements   | Ensure that regular finishes meetings are carried out throughout the design process  | L           | M      | LOW               | 80%                   | TWI        | Cost impact dependent on agreed final finishes   |
| 3.04    | Samples   | Ensure any available or required samples are available for design meetings for approvals   | L           | M      | LOW               | 50%                   | TWI        |  |
| 4       | Pre-Construction  |  |             |        |                   |                       |            |  |
| 4.01    | Validations   | Thorough validations required on all mechanical and electrical systems to ensure everything is in full working order prior to starting on site, so that the landlord can rectify any issues. | M           | M      | MED               | 25%                   | TWI        | Within the tender pack we have received a details MEPH validation already, we will need to carry out our own but the current pack is very comprehensive  |
| 4.02    | COVID 19  | Site Operating Procedures updated, COVID risk assessment created, we have secured materials and have back-up labour if required  | L           | L      | MED               | 50%                   | TWI        | Construction is allowed to continue as usual and all our sites are open and on programme.  |
| 4.03    | BREXIT  | BREXIT has not effected ThirdWay. We have aligned with all legislation to ensure compliance and reviewed all suppliers to capture any concerns on furniture / materials.                     | L           | L      | LOW               | 25%                   | TWI        | All lead times are being managed and we currently expect no delays as a result of Brexit.  |
| 5       | Construction  |  |             |        |                   |                       |            |  |
| 5.01    | Programme Management  | Correct programming and procurement to be adhered to by both TWI and client team.  | H           | H      | MED               | 75%                   | TWI        | TWI have reviewed the proposed programme and are comfortable with the time allowed for design development and construction. However, it should be noted that there is not much allowance for slippage so it will require the project team to meet all required deadlines and sign off dates. |
| 5.02    | Noisy Working hours   | Early understanding of Noisy working times relative to the building and other building users   | M           | M      | LOW               | 50%                   | TWI        | Due to the building being tenanted we will carry out noisy works before 9am and at lunchtime. We will also communicate with tenants if required  |
| 5.03    | Procurement   | Full procurement Schedule to be produced as part of final submission after design freeze and cost review   | M           | M      | LOW               | 40%                   | TWI        |  |
| 5.04    | Quality Control   | Regular Site meetings and client engagement sessions to be agreed and implemented  | L           | L      | LOW               | 70%                   | TWI        | All TWI team members responsible for high quality.   |
| 5.05    | Variations Management   | Project meeting packs and account statements to be produced weekly for client review and agreement   | L           | L      | LOW               | 50%                   | TWI        | We have included info on change order processes  |
| 5.06    | Commissioning   | Early agreement with incumbent and building contractors required for commissioning to ensure programme is maintained from the start  | L           | L      | LOW               | 50%                   | TWI        |  |
| 6       | Post Construction   |  |             |        |                   |                       |            |  |
| 6.01    | Management of Snagging and Additional Works   | Throughout the project and during progress meetings, comments and snagging strategy to be agreed as required to ensure easy handover.  | H           | M      | MED               | 75%                   | TWI        | Snagging has no cost impact. Change orders may but will be offset against omits.   |
| 6.02    | Warranties  | Ensure all required warranites are executed and returned in good time in line with requirements  | M           | H      | MED               | 25%                   | TWI        |  |
| 6.03    | Post Contract Works   | Ensure that aftersales teams are introduced to the client several weeks before completion to enable clear dialogue can be in place immediately for client post move in                       | H           | L      | MED               | 100%                  | TWI        | Our aftercare team are on hand through the course of your lease. 12 month warranty as standard. Furniture warranty - 5 year minimum  |
|         |   |  |             |        | <b>Total Risk</b> |                       |            |  |



# PROCUREMENT STRATEGY

## SUBCONTRACTOR SELECTION PROCESS

TWI have a pool of subcontractors that we use across the board, we have selected 3 subcontractors to tender for the project, the selected contractors be chosen on a variety of factors, not only for financial reasons

| TRADE          | COMPANY NAME                       | PPQ | INSURANCE | CONTRACT SUITABILITY | PROJECT SCALE SUITABILITY | TEAM COMPATIBILITY | WORKLOAD | COMPETITIVE QUOTE | H&S | APPROVED |
|----------------|------------------------------------|-----|-----------|----------------------|---------------------------|--------------------|----------|-------------------|-----|----------|
| ELECTRICAL     | TES                                | ✓   | ✓         | ✓                    | ✓                         |                    | ✓        | ✓                 | ✓   | ✓        |
|                | Bridgegate Electrical              | ✓   | ✓         | ✓                    | ✓                         | ✓                  |          |                   | ✓   |          |
|                | City Electrical                    | ✓   | ✓         |                      |                           | ✓                  | ✓        |                   | ✓   |          |
| MECHANICAL     | Conditioned Environments           | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | Callisia Mechanical Engineering    | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | Celsius Environmental Services Ltd | ✓   | ✓         | ✓                    |                           |                    | ✓        | ✓                 | ✓   |          |
| PARTITION      | Rubix                              | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | Orange Projects                    | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | LBS                                | ✓   | ✓         | ✓                    |                           | ✓                  | ✓        |                   | ✓   |          |
| CEILINGS       | Rubix                              | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | Level Best Solutions               | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | Orange Projects                    | ✓   | ✓         |                      |                           | ✓                  | ✓        |                   | ✓   |          |
| PUBLIC HEALTH  | FPRS                               | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | MPL                                | ✓   | ✓         | ✓                    | ✓                         |                    | ✓        |                   | ✓   |          |
| DECORATIONS    | RDL                                | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | Vivid                              | ✓   | ✓         |                      |                           | ✓                  | ✓        | ✓                 | ✓   |          |
|                | King Decor                         | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        |                   | ✓   |          |
| AV / IT        | Precision AV                       | ✓   | ✓         | ✓                    |                           |                    |          | ✓                 | ✓   |          |
|                | MVS                                | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | Twisted Pair                       | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
| FLOOR FINISHES | Carters Contract Flooring          |     | ✓         | ✓                    | ✓                         | ✓                  |          | ✓                 | ✓   |          |
|                | Delta Flooring                     | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | PMH Flooring                       | ✓   | ✓         | ✓                    | ✓                         |                    |          | ✓                 | ✓   |          |
| JOINERY        | JBL                                | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |
|                | Luxe                               | ✓   | ✓         | ✓                    | ✓                         | ✓                  | ✓        | ✓                 | ✓   | ✓        |

